


## 1.77" TFT

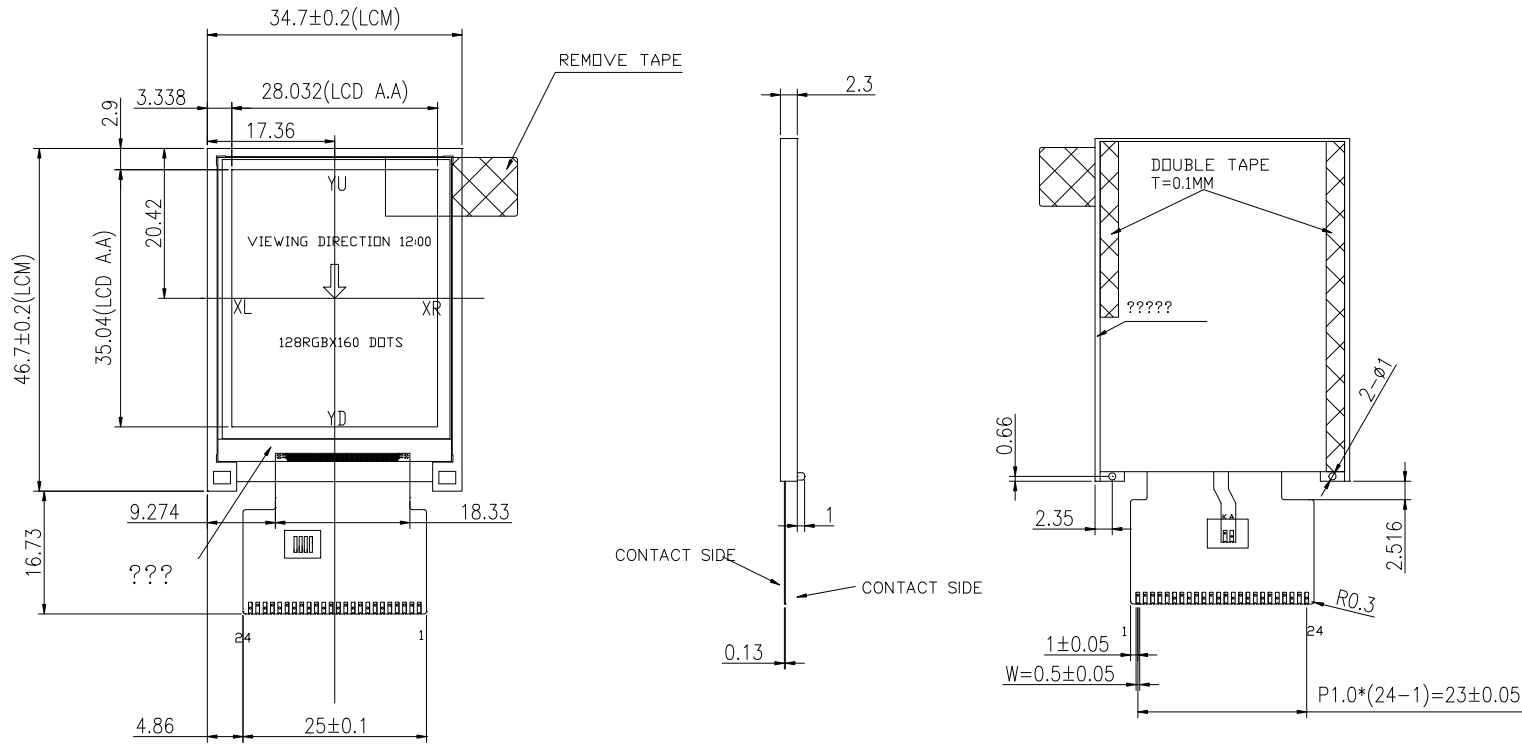

ITEM		STANDARD VALUE	
Viewing direction		70/70/70/60	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ST7735S-G4-1	
Interface		8BIT MCU	
Backlight		2 Chip LED	
Brightness		300cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LED_K	13	DB6
2	LED_A	14	DB5
3	GND	15	DB4
4	VDD	16	DB3
5	TE	17	DB2
6	NC	18	DB1
7	/CS	19	DB0
8	/RESET	20	GND
9	RS	21	TOUCH-YU+
10	/WR	22	TOUCH-YU-
11	/RD	23	TOUCH-XL+
12	DB7	24	TOUCH-XR+

メモ :