


2.8"TFT

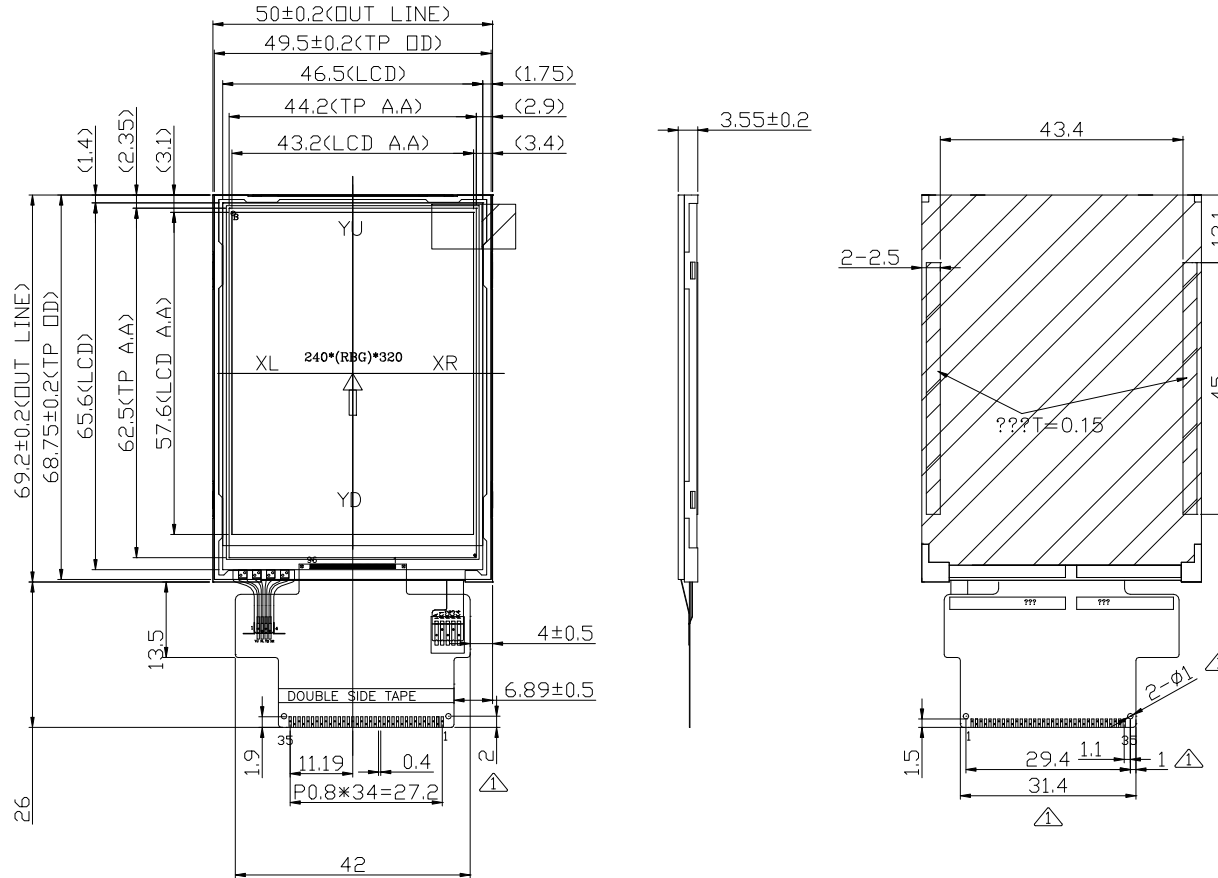

ITEM		STANDARD VALUE	
Viewing direction		50/50/40/50	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ST7789V2	
Interface		8BIT MCU	
Backlight		4 Chip LED	
Brightness		200cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	19	D3(NC)
2	YU(NC)	20	D2(NC)
3	XL(NC)	21	D1(NC)
4	YD(NC)	22	D0(NC)
5	XR(NC)	23	CS
6	GND	24	RS
7	D15	25	WR
8	D14	26	RD
9	D13	27	IM0
10	D12	28	RST
11	D11	29	IOVDD
12	D10	30	VCI
13	D9	31	A+
14	D8	32	K1-
15	D7(NC)	33	K2-
16	D6(NC)	34	K3-
17	D5(NC)	35	K4-
18	D4(NC)	-	-

メモ :