


3.5" TFT

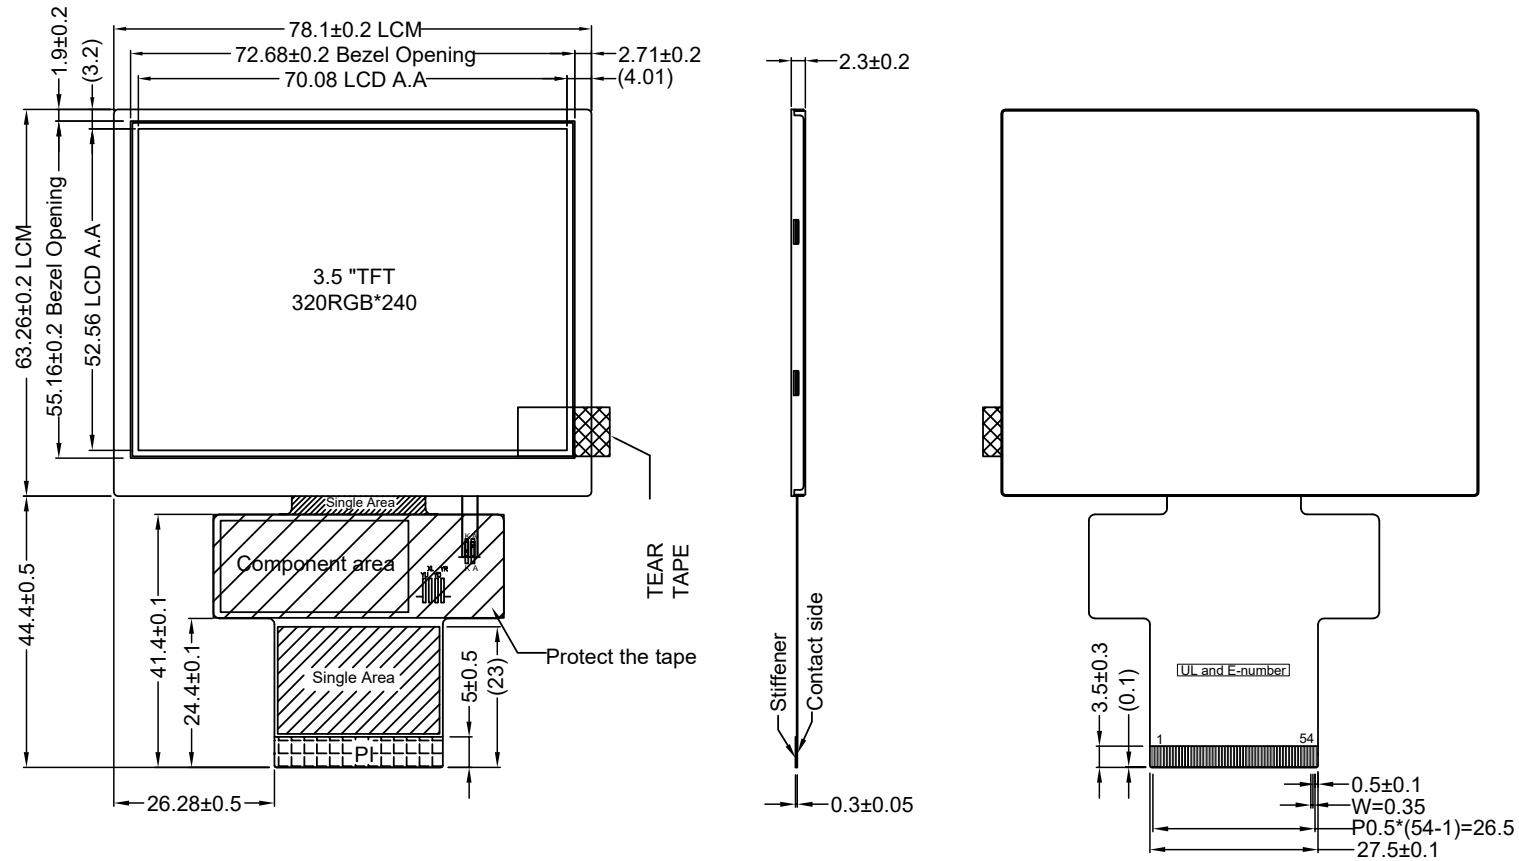

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ST7272A	
Interface		SPI+24BIT RGB	
Backlight		6 Chip LED	
Brightness		300cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1-2	LED-K	25	G5
3-4	LED-A	26	G6
5-7	NC	27	G7
8	RESET	28	R0
9	/CS	29	R1
10	SCK	30	R2
11	SDI	31	R3
12	B0	32	R4
13	B1	33	R5
14	B2	34	R6
15	B3	35	R7
16	B4	36	HSYNC
17	B5	37	VSYNC
18	B6	38	DOTCLK
19	B7	39-40	NC
20	G0	41-42	V D D
21	G1	43-51	NC
22	G2	52	DEN
23	G3	53	GND
24	G4	54	GND

メモ :