
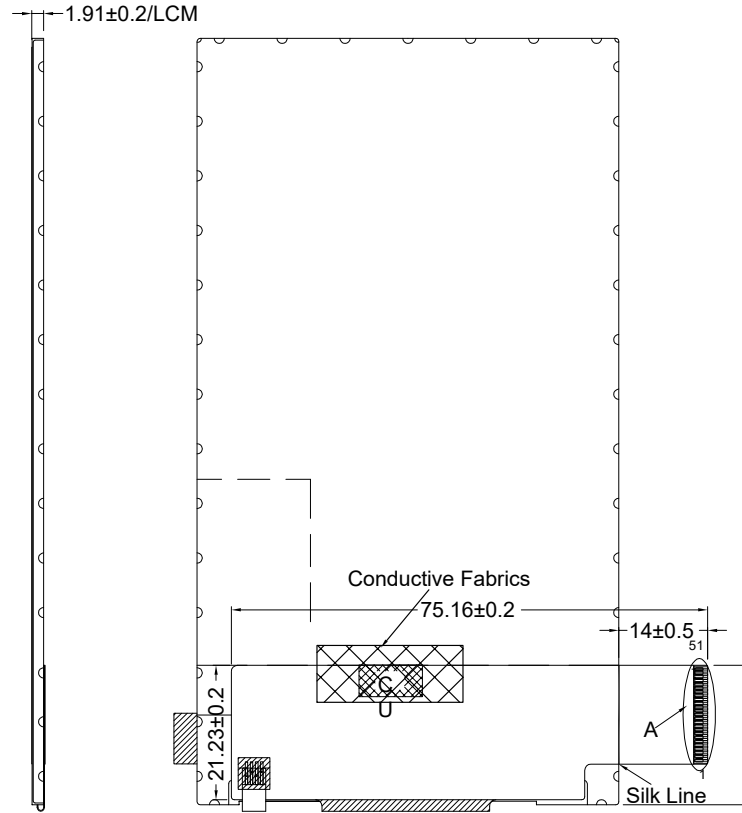


5.0" TFT

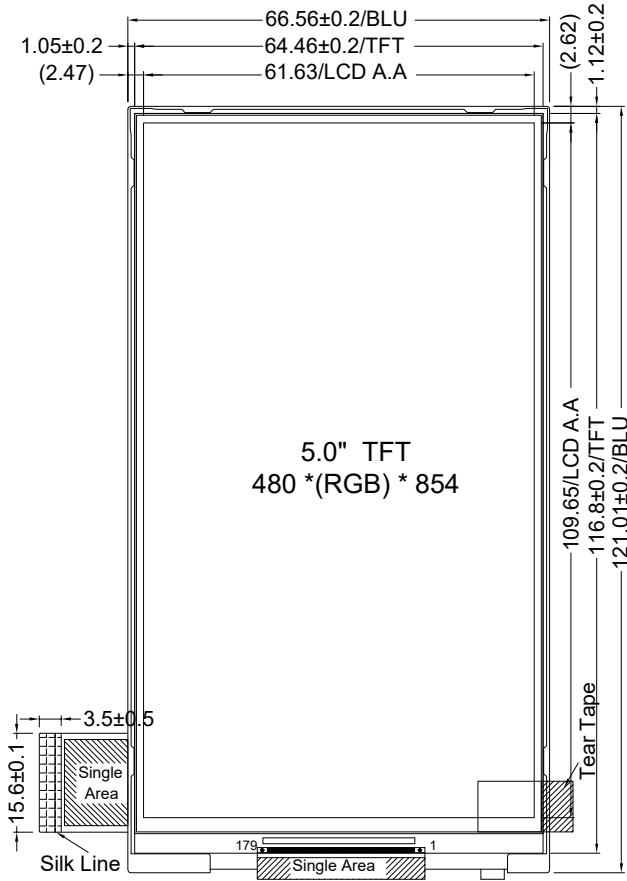

ITEM		STANDARD VALUE	
Viewing direction		Full View	
Display mode		Transmissive	
Operation temp		-20°C To +70°C	
Storage temp		-30°C To +80°C	
Driver IC		ILI9806E	
Interface		3wire SPI+24-Bit	
Backlight		White(12LED)	
Brightness		450cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	27	DB11&G3
2	GND	28	DB12&G4
3	NC	29	DB13&G5
4	K	30	DB14&G6
5	A	31	DB15&G7
6	NC	32	DB16&R0
7	VCC	33	DB17&R1
8	IOVCC	34	DB18&R2
9	NC	35	DB19&R3
10	GND	36	DB20&R4
11	VSYNC	37	DB21&R5
12	HSYNC	38	DB22&R6
13	PCLK	39	DB23&R7
14	DE	40	GND
15	GND	41	RESET
16	DB0&BO	42	CS
17	DB1&B1	43	SCL
18	DB2&B2	44	SDI
19	DB3&B3	45	SDO
20	DB4&B4	46	TE
21	DB5&B5	47	GND
22	DB6&B6	48	IM3
23	DB7&B7	49	GND
24	DB8&G0	50	NC
25	DB9&G1	51	GND
26	DB10&G2		

メモ :