
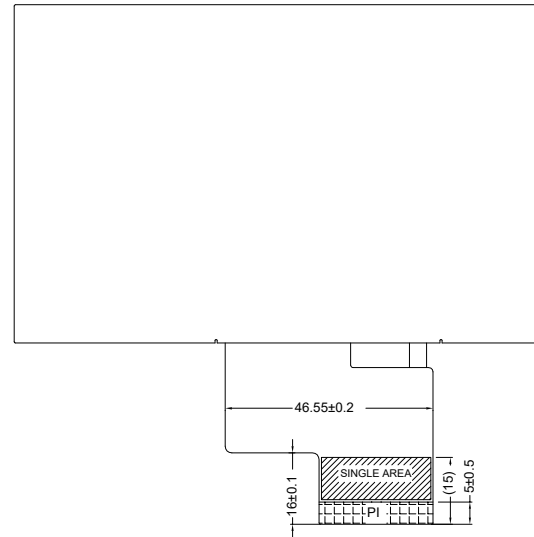
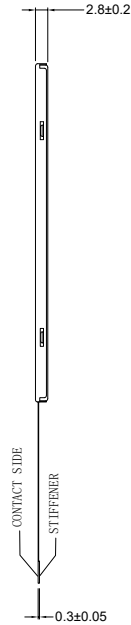


5.0" TFT

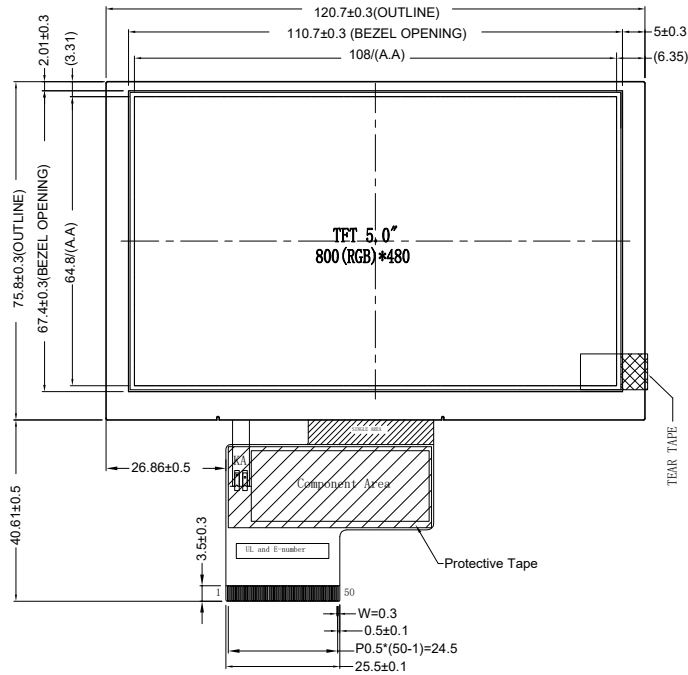

ITEM		STANDARD VALUE	
Viewing direction		12 O'CLOCK	
Display mode		Transmissive	
Operation temp		0°C To 50°C	
Storage temp		-10°C To 60°C	
Driver IC		HX8664/HX8264	
Interface		24-Bit RGB	
Backlight		White(12LED)	
Brightness		250cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	VLED+	26	R7
2	VLED-	27	R6
3	GND	28	R5
4	VCOM	29	R4
5	DVDD	30	R3
6	MODE	31	R2
7	DE	32	R1
8	VS	33	R0
9	HS	34	GND
10	B7	35	DCLK
11	B6	36	GND
12	B5	37	L/R
13	B4	38	U/D
14	B3	39	VGH
15	B2	40	VGL
16	B1	41	AVDD
17	B0	42	RESET
18	G7	43	NC
19	G6	44	VCOM
20	G5	45	DITHB
21	G4	46	GND
22	G3	47	NC/(YU)
23	G2	48	NC/(XL)
24	G1	49	NC/(YD)
25	G0	50	NC/(XR)

メモ :