
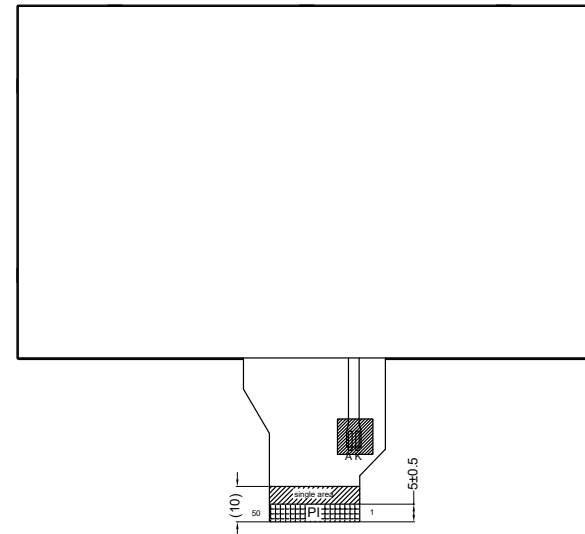


7.0" TFT

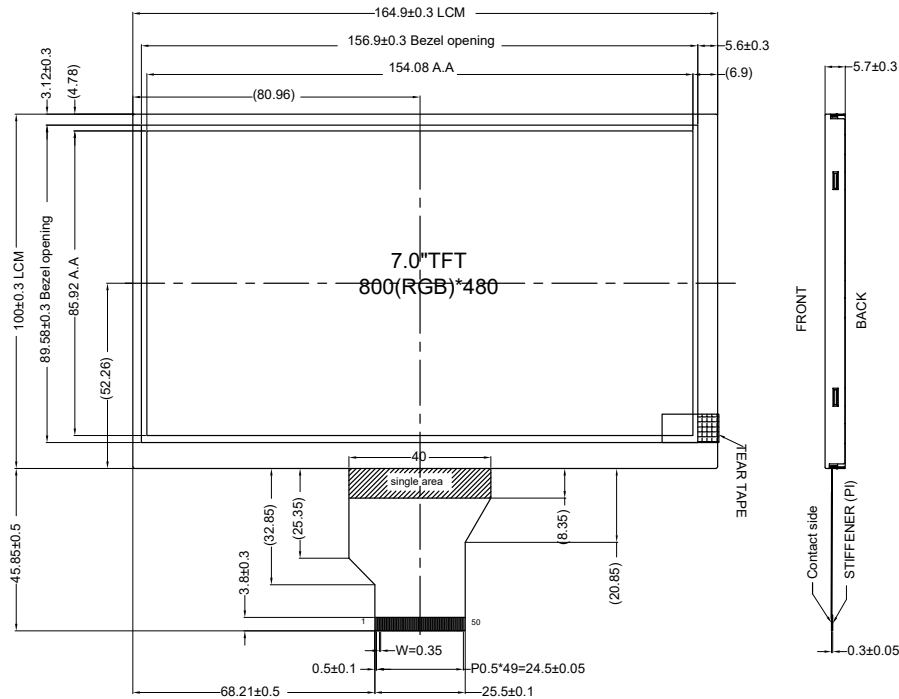

ITEM		STANDARD VALUE	
Viewing direction		12 O'CLOCK	
Display mode		Transmissive	
Operation temp		-20°C To +70°C	
Storage temp		-30°C To +80°C	
Driver IC		EK9713CA&EK73002A	
Interface		24-Bit RGB	
Backlight		White(27LED)	
Brightness		420cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LED-A	26	G1
2	LED-A	27	G0
3	LED-K	28	R7
4	LED-K	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DVDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

メモ :