
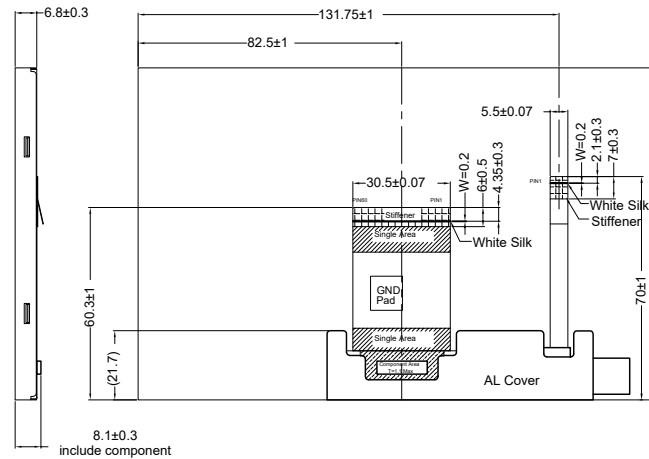


7.0" TFT

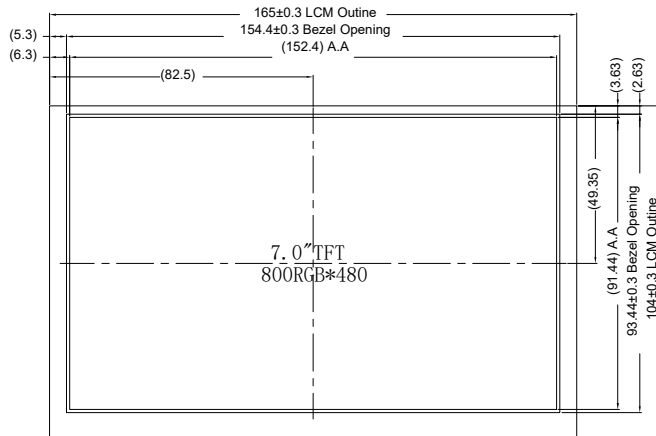

ITEM		STANDARD VALUE			
Viewing direction		FULL VIEW			
Display mode		Transmissive			
Operation temp		-30°C To 85°C			
Storage temp		-40°C To 95°C			
Driver IC		HX8369B			
Interface		3wire SPI+24bits-RGB			
Backlight		White(28LED)			
Brightness		1000cd/m2 (Typ)			
PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	AGND	21	B1	41	VCOM
2	AVDD	22	B2	42	N/C
3	VCC	23	B3	43	BIST
4	R0	24	B4	44	N/C
5	R1	25	B5	45	N/C
6	R2	26	B6	46	N/C
7	R3	27	B7	47	N/C
8	R4	28	DCLK	48	CSB
9	R5	29	DE	49	SCL
10	R6	30	HSD	50	SDO
11	R7	31	VSD	51	SDI
12	G0	32	MODE	52	N/C
13	G1	33	RSTB	53	VPP_T
14	G2	34	STBYB	54	N/C
15	G3	35	SHLR	55	N/C
16	G4	36	VCC	56	VGH
17	G5	37	UPDN	57	VCC
18	G6	38	GND	58	VGL
19	G7	39	AGND	59	GND
20	B0	40	AVDD	60	N/C

メモ :