


9.0" TFT

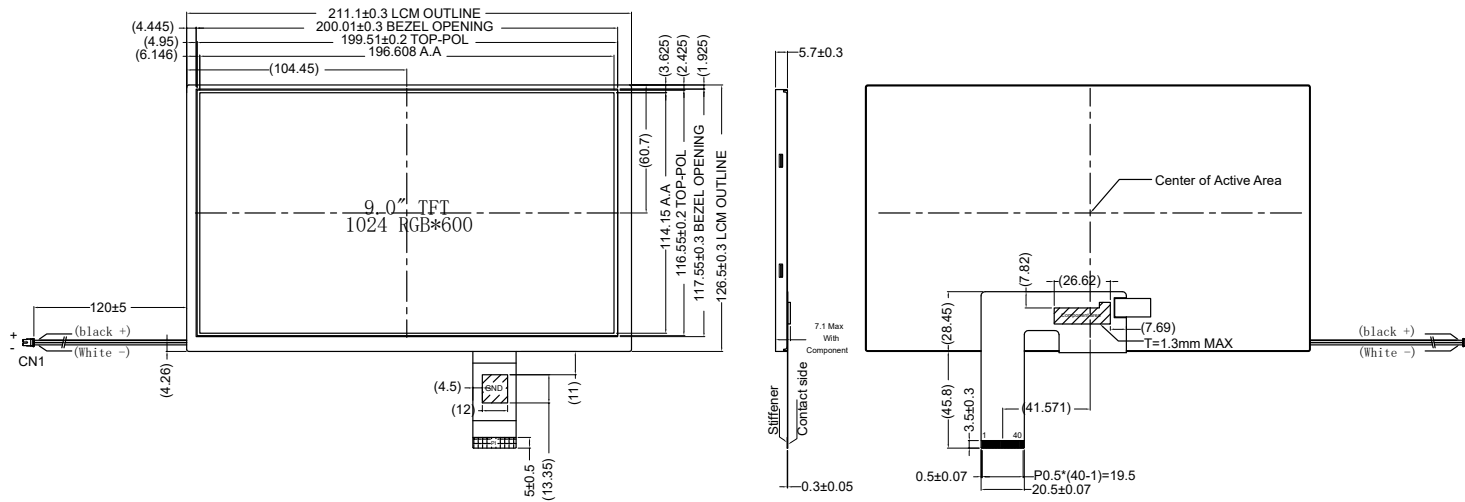

ITEM		STANDARD VALUE	
Viewing direction		Full viewing	
Display mode		Transmissive	
Operation temp		-30°C ~ 85°C	
Storage temp		-30°C ~ 85°C	
Driver IC		N/A	
Interface		LVDS Interface	
Backlight		39 White LEDs	
Brightness		500 cd/m	
PIN	SYMBOL	PIN	SYMBOL
1	VCOM	21	GND
2	VDD	22	RXIN3
3	VDD	23	RXIN3+
4	NC	24	GND
5	RESET	25	SELB
6	U/D	26	GND
7	L/R	27	AVDD
8	STBYB	28	GND
9	GND	29	VGH
10	RXCLKI	30	NC
11	RXCLKI	31	NC
12	GND	32	VGL
13	RXIN0-	33	GND
14	RXIN0+	34	NC
15	GND	35	NC
16	RXIN1-	36	NC
17	RXIN1+	37	NC
18	GND	38	NC
19	RXIN2-	39	NC
20	RXIN2+	40	NC

メモ :