


1.5"TFT

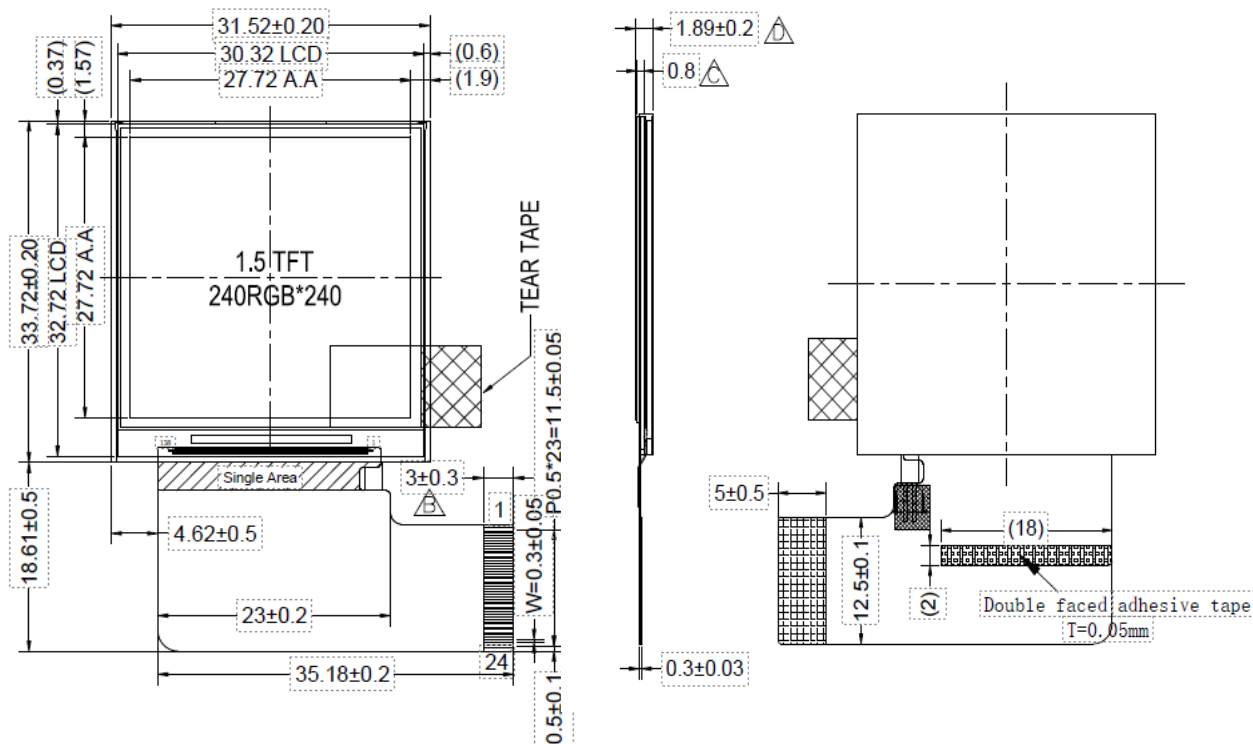

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7789T3	
Interface		4WireSPI	
Brightness		300cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LEDK	13	VCC(2.8)
2	LEDK	14	VCC(2.8)
3	GND	15	GND
4	GND	16	GND
5	TE	17	SDO
6	SDA	18	NC
7	WRX	19	NC
8	DCX	20	NC
9	CSX	21	NC
10	RESX	22	NC
11	IOVCC(1.8/2.8)	23	LEDA
12	IOVCC(1.8/2.8)	24	LEDA

メモ :