


## 4.0" TFT

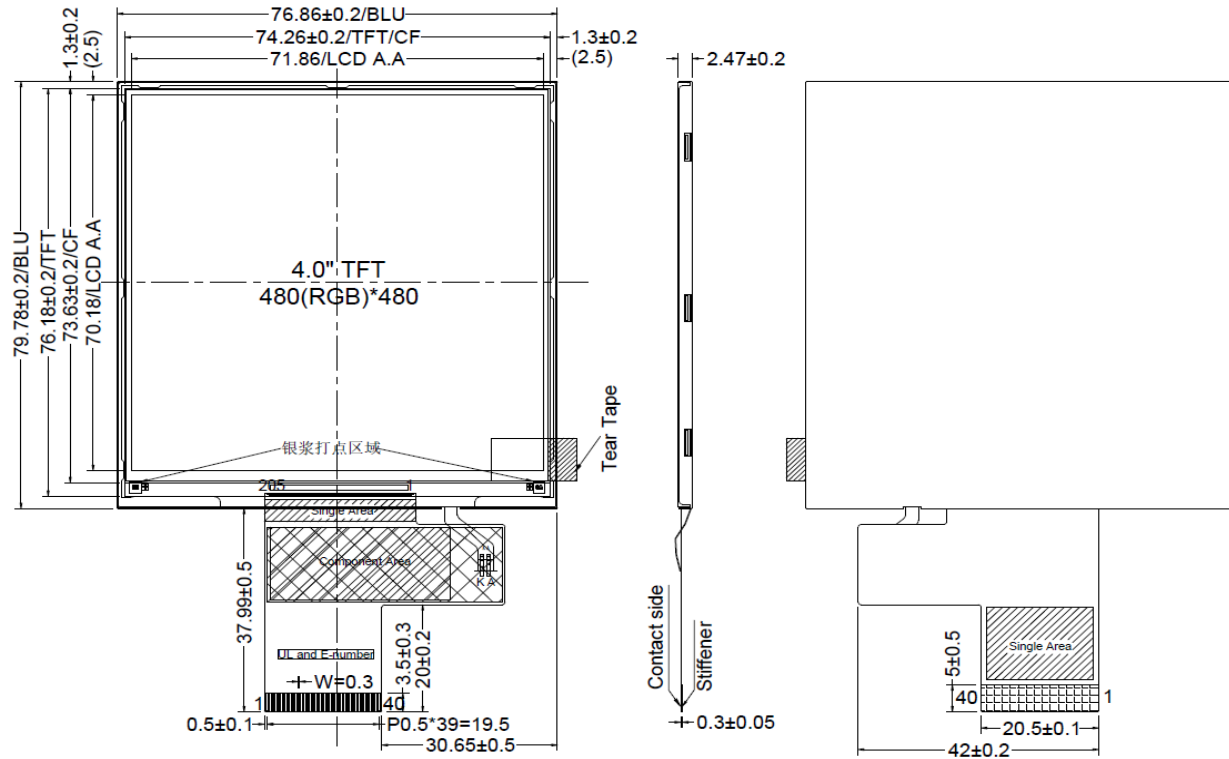

メモ :

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30 To 80 °C	
Driver IC		ST7701SN	
Interface		3Wire+24bitRGB	
Brightness		450cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	21	DB7
2	RESET	22	DB8
3	VCC	23	DB9
4	CS	24	DB10
5	SCL	25	DB11
6	SDA	26	DB12
7	GND	27	DB13
8	PCLK	28	DB14
9	GND	29	DB15
10	VS	30	DB16
11	HS	31	DB17
12	DE	32	DB18
13	GND	33	DB19
14	DB0	34	DB20
15	DB1	35	DB21
16	DB2	36	DB22
17	DB3	37	DB23
18	DB4	38	GND
19	DB5	39	LEDK
20	DB6	40	LEDA