


8. 4" TFT

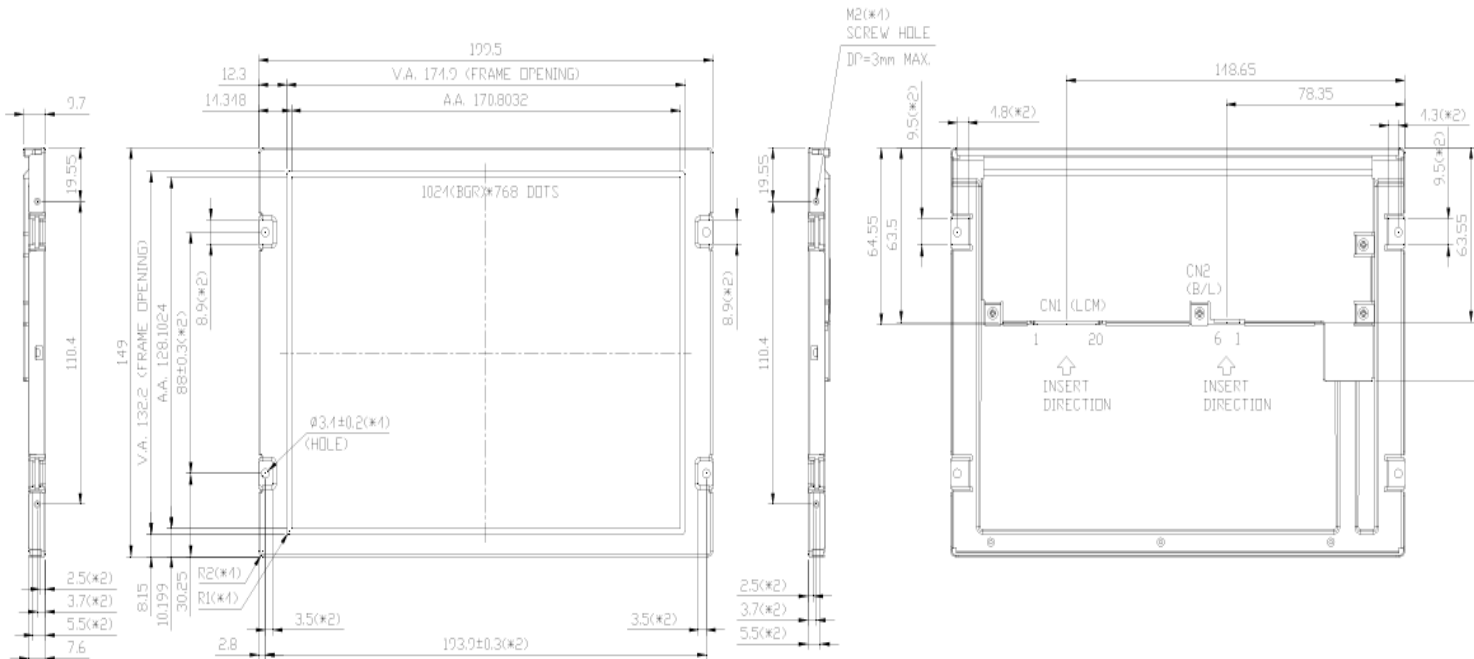

ITEM		STANDARD VALUE	
Viewing direction		SUPER WIDE VIEW	
Display mode		TRANSMISSIVE	
Operation temp		-30~80°C	
Storage temp		-30~80°C	
Driver IC		ST5821AH	
Interface		LVDS 6/8 bit	
Backlight		LED, WHITE	
Brightness		1000cd/m ²	
PIN	SYMBOL	PIN	SYMBOL
1	VDD	11	LINK2-
2	VDD	12	LINK2+
3	VSS	13	VSS
4	VSS	14	CLKIN-
5	LINK0-	15	CLKIN+
6	LINK0+	16	VSS
7	VSS	17	LINK3-
8	LINK1-	18	LINK3+
9	LINK1+	19	MODE
10	VSS	20	SC

メモ :