


12.3" TFT

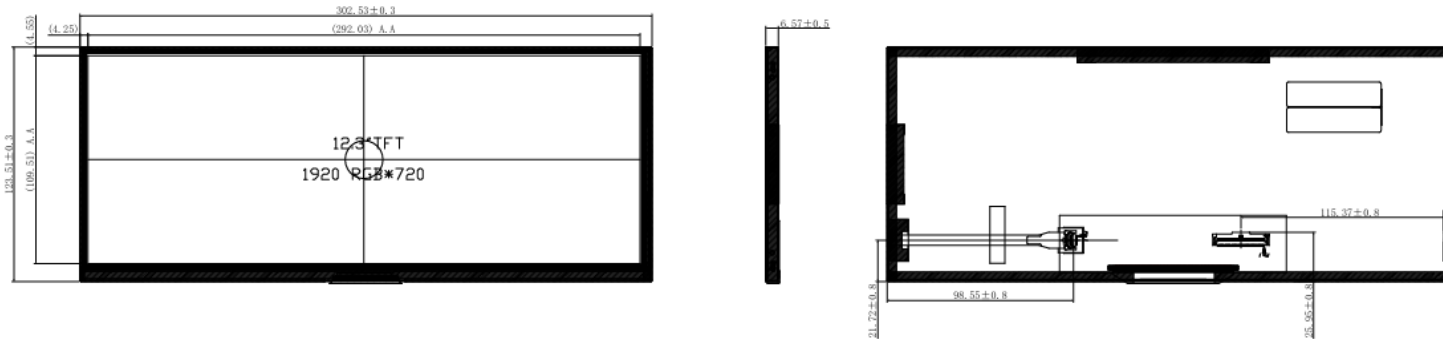

メモ :

ITEM		STANDARD VALUE	
Viewing direction		FULL VIEW	
Display mode		TRANSMISSIVE	
Operation temp		-30~85°C	
Storage temp		-40~90°C	
Driver IC			
Interface		LVDS	
Backlight		WHITE	
Brightness		880cd/m ²	
PIN	SYMBOL	PIN	SYMBOL
1	GND	26	ERXCLKIN-
2	BIST	27	ERXCLKIN+
3	VCC	28	ERXIN3-
4	VCC	29	ERXIN3+
5	GND	30	GND
6	GND	31	FAULT
7	OTP	32	RESET
8	NC	33	STBYB
9	GND	34	CSB
10	ORXIN0-	35	SCL
11	ORXIN0+	36	SDAI
12	ORXIN1-	37	SDAO
13	ORXIN1+	38	GND
14	ORXIN2-	39	GND
15	ORXIN2+	40	NC
16	ORXCLKIN-	41	LEDA
17	ORXCLKIN+	42	LEDA
18	ORXIN3-	43	LEDA
19	ORXIN3+	44	NC
20	ERXIN0-	45	LEDK
21	ERXIN0+	46	LEDK
22	ERXIN1-	47	LEDK
23	ERXIN+	48	LEDK
24	ERXIN2-	49	NTC A
25	ERXIN2+	50	NTC K