


## 5inch TFT

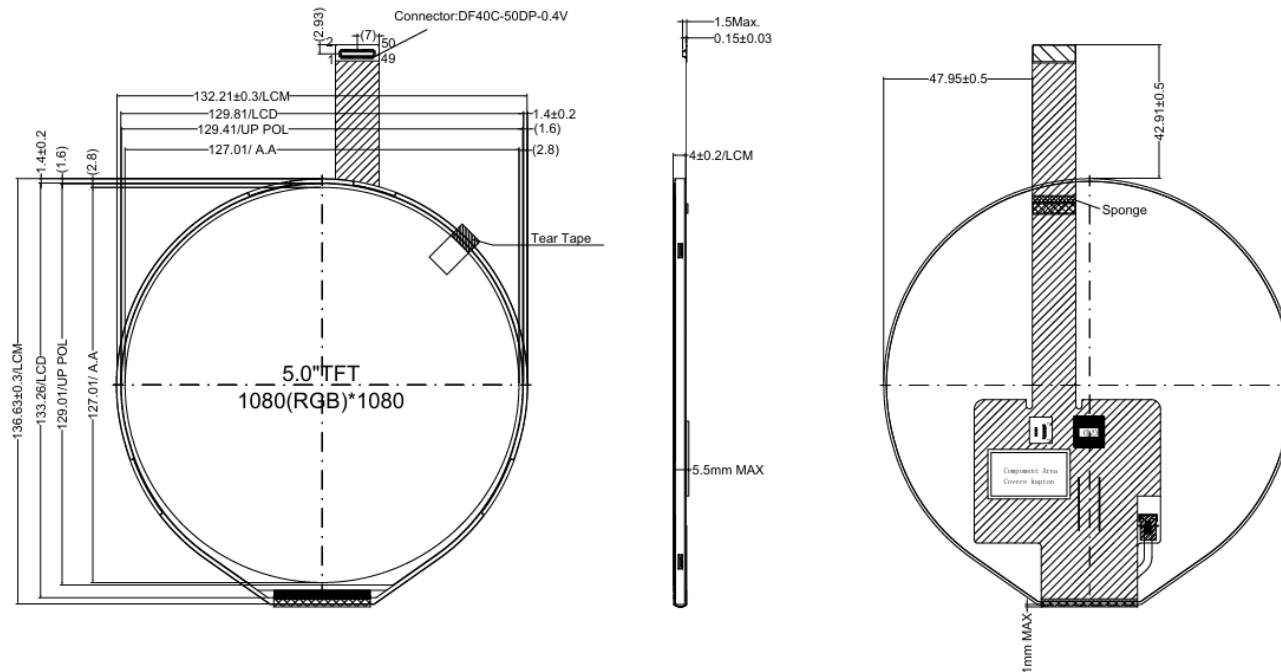

メモ :

ITEM		STANDARD VALUE	
Viewing direction		Full Viewing	
Display mode		Transmissive	
Operation temp		-20°C~+60°C	
Storage temp		-30°C~+70°C	
Interface		3wireSPI+18bitRG	
Backlight		White(8LED)	
Brightness		400(TYP)cd/m2	
PIN		SYMBOL	
PIN	SYMBOL	PIN	SYMBOL
1	GND	26	GND
2	GND	27	LAN3_P
3	LAN2_P	28	NC
4	LEDK	29	LAN3_N
5	LAN2_N	30	VDD(-5V)
6	LEDK	31	GND
7	GND	32	VDD(-5V)
8	GND	33	NC
9	LAN_P	34	NC
10	LEDA	35	NC
11	LAN1_N	36	VDD(+5V)
12	LEDA	37	GND
13	GND	38	VDD(+5V)
14	GND	39	NC
15	CLK_N	40	NC
16	ID_PIN2	41	NC
17	CLK_N1	42	GND
18	ID_PIN1	43	NC
19	GND	44	LEDPW
20	GND	45	NC
21	LAN0_P	46	TE
22	IOVCC	47	GND
23	LAN0_N	48	RESET
24	IOVCC	49	GND
25	GND	50	GND