


## 12.1" TFT

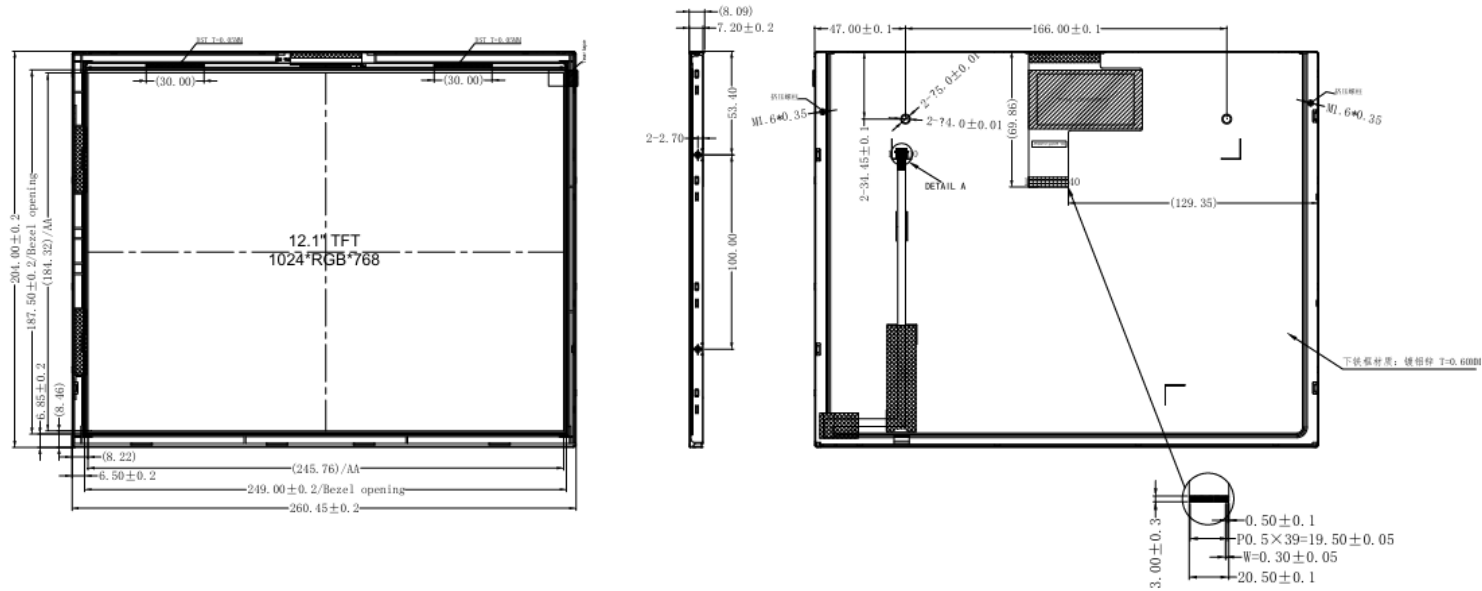

ITEM		STANDARD VALUE	
Viewing direction		FULL VIEW	
Display mode		TRANSMISSIVE	
Operation temp		0~50°C	
Storage temp		-10~60°C	
Driver IC		JD9168S	
Interface		LVDS	
Backlight		WHITE	
Brightness		450cd/m <sup>2</sup>	
PIN	SYMBOL	PIN	SYMBOL
1	VGLO	21	D3N
2	VGHO	22	GND
3	VSN	23	CLKP
4	VSN	24	CLKN
5	VSP	25	GND
6	VSP	26	D2P
7	NC	27	D2N
8	SCL	28	GND
9	SDI	29	D1P
10	CS	30	D1N
11	VDD	31	GND
12	BIST	32	D0P
13	SCA 12C	33	D0N
14	SDL 12C	34	GND
15	NC	35	RESET
16	IOVCC	36	STBYB
17	IOVCC	37	GND
18	IOVCC	38	GND
19	GND	39	GND
20	D3P	40	NC

メモ :