


13.3" TFT

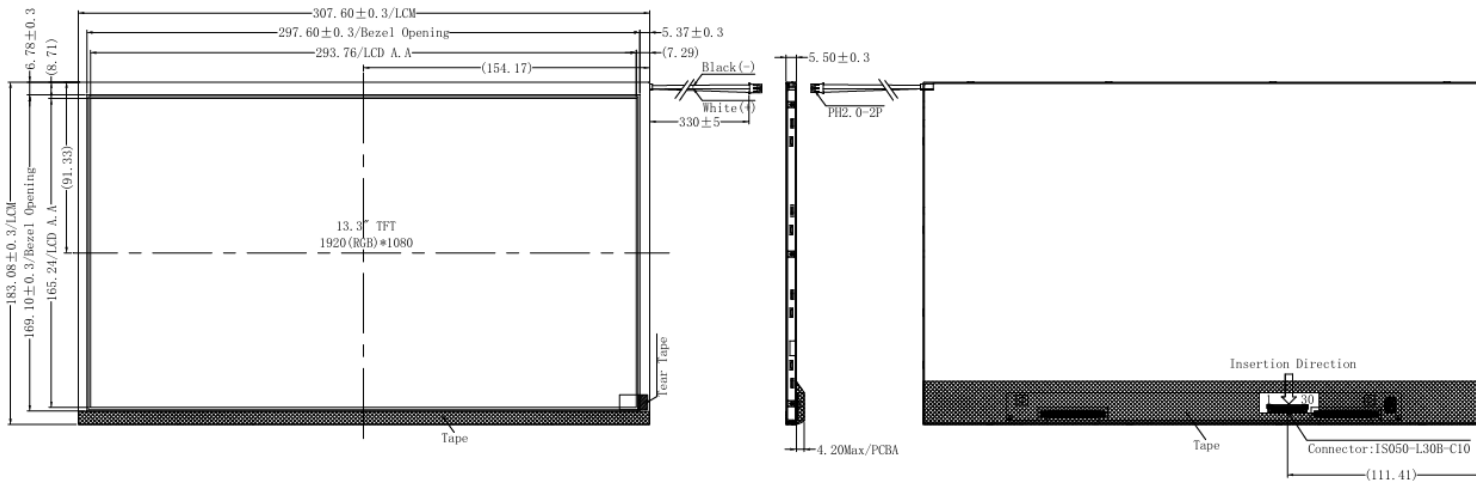

ITEM		STANDARD VALUE	
Viewing direction		FULL VIEW	
Display mode		TRANSMISSIVE	
Operation temp		0~50°C	
Storage temp		-20~60°C	
Interface		EDP Interface	
Backlight		WHITE	
Brightness		400cd/m ²	
PIN	SYMBOL	PIN	SYMBOL
1	CABC_E	16	GND
2	GND	17	HPD
3	Lane1_N	18	NC
4	Lane1_P	19	NC
5	GND	20	NC
6	Lane0_N	21	NC
7	Lane0_P	22	NC
8	GND	23	NC
9	AUX_CH_P	24	NC
10	AUX_CH_N	25	NC
11	GND	26	NC
12	LCD_VCC	27	NC
13	LCD_VCC	28	NC
14	LCD-TEST	29	NC
15	GND	30	NC

メモ :