


15.6" TFT

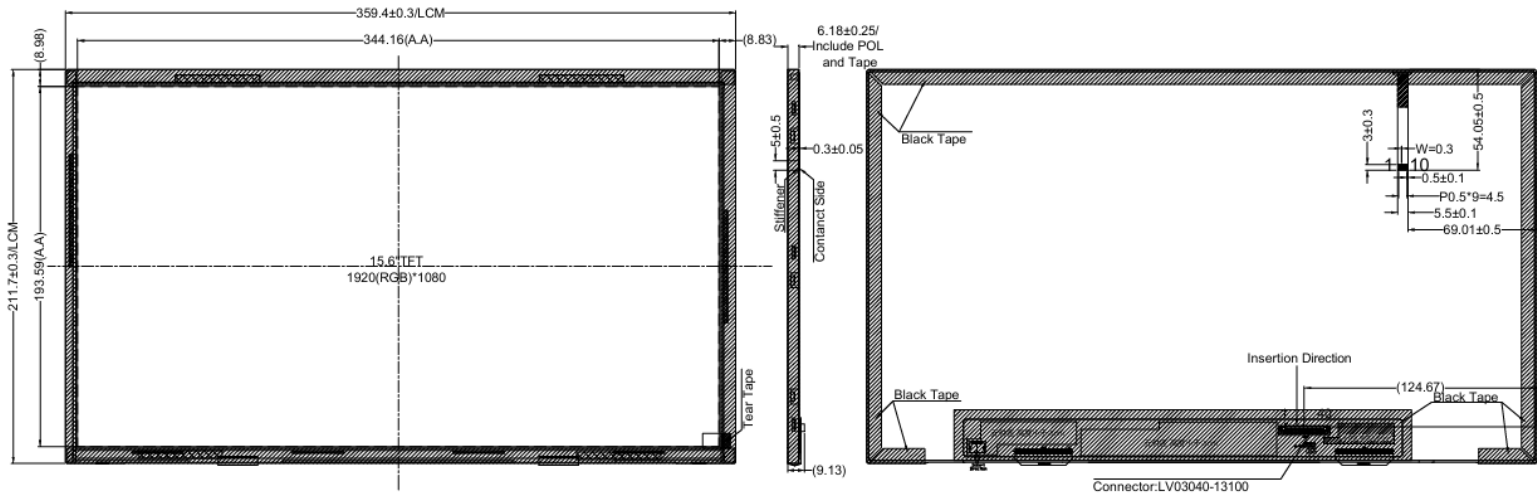

ITEM		STANDARD VALUE	
Viewing direction		FULL VIEW	
Display mode		TRANSMISSIVE	
Operation temp		-20~70°C	
Storage temp		-30~80°C	
Interface		LVDS	
Backlight		WHITE	
Brightness		250cd/m <sup>2</sup>	
PIN	SYMBOL	PIN	SYMBOL
1	RE3P	21	RO1N
2	RE3N	22	RO0P
3	RECLKP	23	RO0N
4	RECLKN	24	GND
5	RE2P	25	NC
6	RE2N	26	NC
7	GND	27	NC
8	RE1P	28	LCD_VCC
9	RE1N	29	LCD_VCC
10	RE0P	30	LCD_VCC
11	RE0N	31	LED_PWM
12	RO3P	32	LED_EN
13	RO3N	33	GND
14	GND	34	STBYB
15	ROCLKP	35	RSTB
16	ROCKLN	36	GND
17	GND	37	BL_POWER
18	RO2P	38	BL_POWER
19	RO2N	39	BL_POWER
20	RO1P	40	BL_POWER

メモ :