


## 5.7" TFT

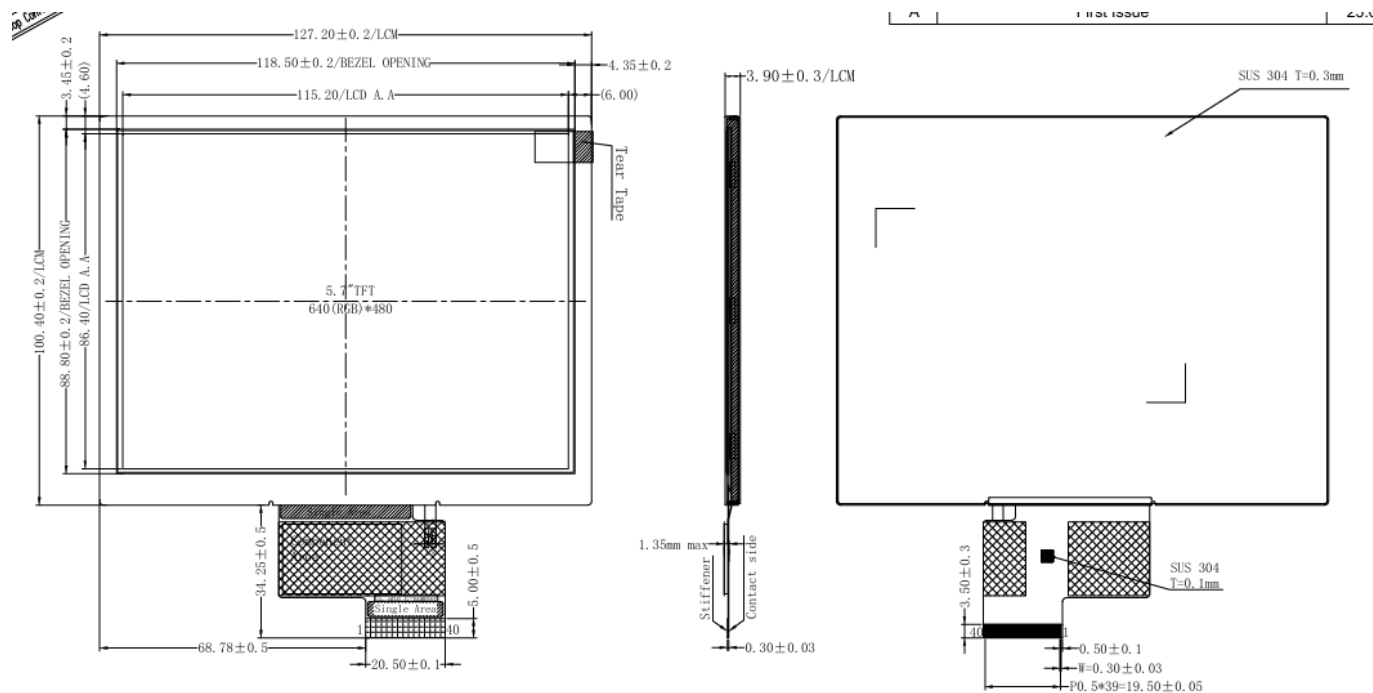

メモ :

ITEM		STANDARD VALUE	
Viewing direction		Full Viewing	
Display mode		Transmissive	
Operation temp		-20°C~+70°C	
Storage temp		-30°C~+80°C	
Driver IC		JD9168S	
Interface		18bitRGB	
Backlight		White(20LED)	
Brightness		350(TYP)cd/m2	
PIN	SYMBOL	PIN	SYMBOL
1	GND	21	R1
2	VDD	22	R2
3	VDD	23	R3
4	GND	24	R4
5	GND	25	R5
6	B0	26	GND
7	B1	27	ENAB
8	B2	28	VDD
9	B3	29	VDD
10	B4	30	R/L
11	B5	31	U/D
12	GND	32	GND
13	G0	33	CK
14	G1	34	GND
15	G2	35	VSYNC
16	G3	36	HSYNC
17	G4	37	GND
18	G5	38	LEDA
19	GND	39	LEDK
20	R0	40	GND