
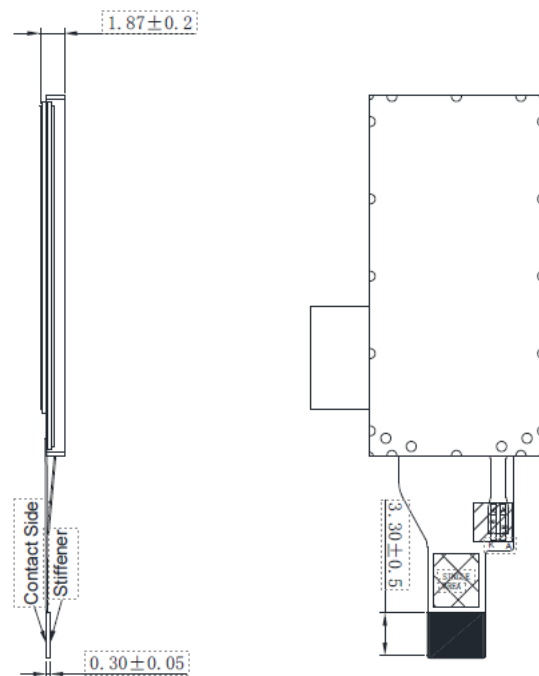


## 0.96"TFT

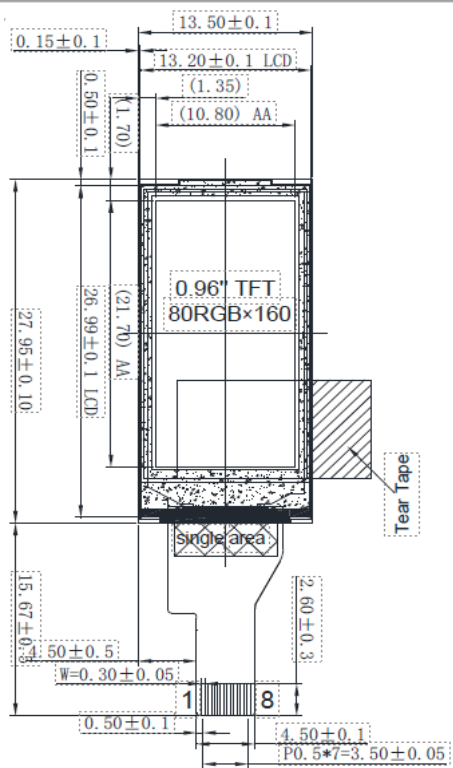

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30 To 80 °C	
Driver IC		ST7735V3	
Interface		4WireSPI	
Brightness		510cd/m2 (Typ)	
PIN	SYMBOL		
1	LEDA		
2	GND		
3	RESET		
4	RS		
5	SDA		
6	SCL		
7	VCC		
8	CS		

メモ :