


## 1.77" TFT

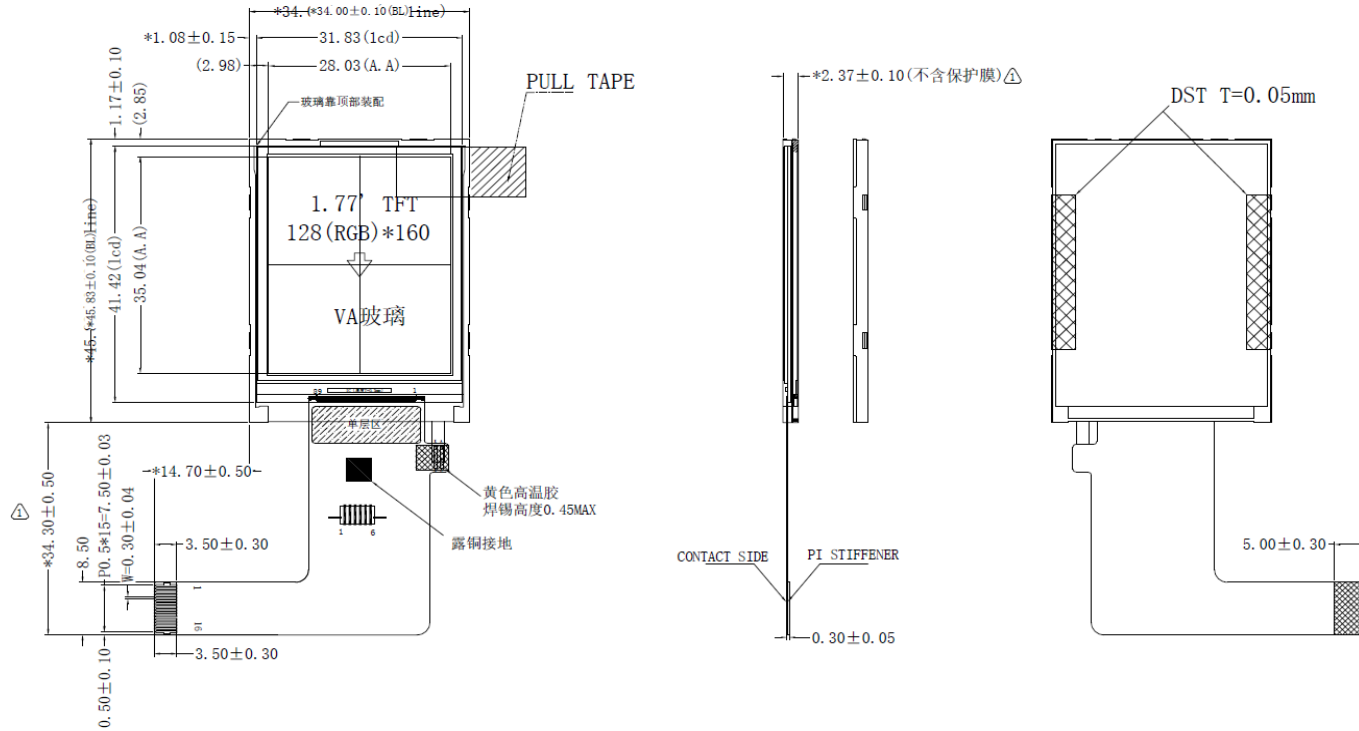

ITEM		STANDARD VALUE	
Viewing direction		TN 120'clock	
Display mode		Transmissive	
Operation temp		-20 To70℃	
Storage temp		-30To80℃	
Driver IC		ST7735V3	
Interface		4WireSPI	
Brightness		500cd/m2 (Typ)	
PIN	SYMBOL		
1	LED K	11	TP_VDD
2	LED A	12	TP_GND
3	SPI4W	13	TP_RST
4	VCC	14	TP_SCL
5	GND	15	TP_SDA
6	CS	16	TP_INT
7	RST		
8	SDA		
9	SCL		
10	D/C		

メモ :