


1.9"TFT

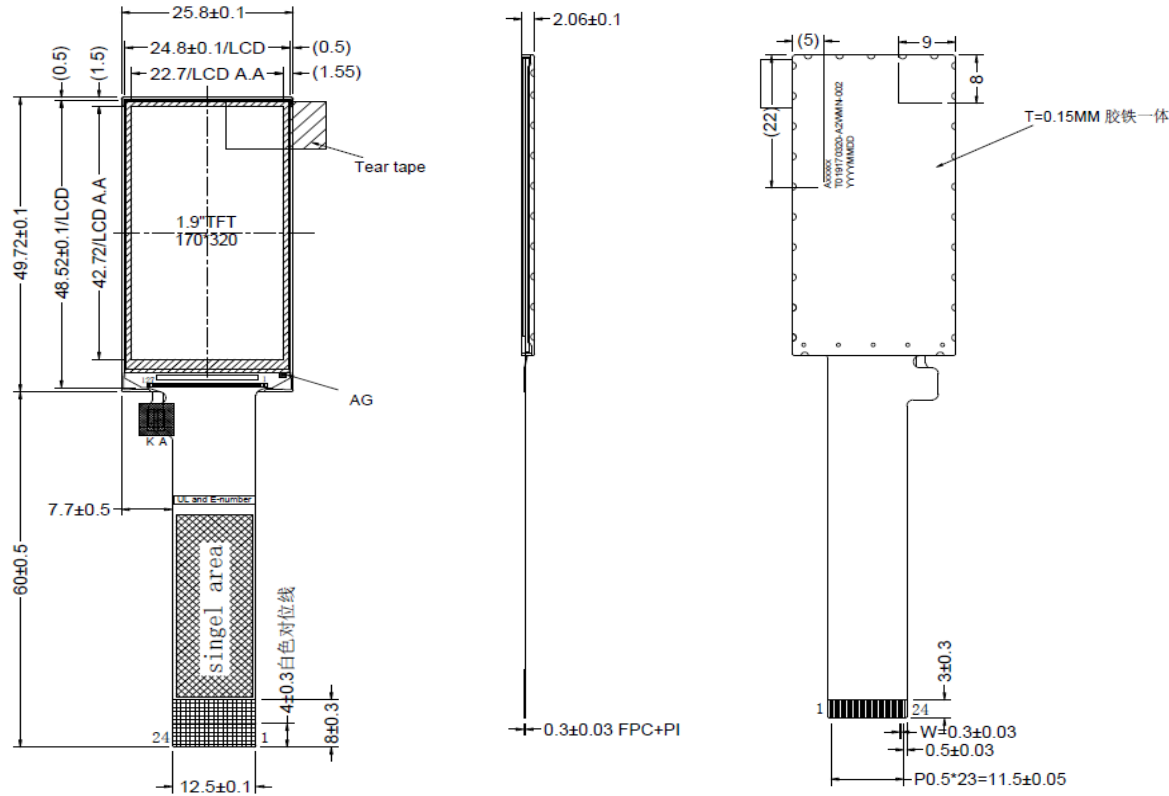

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30 To 80 °C	
Driver IC		ST7789P3	
Interface		SPI	
Brightness		300cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	SDO	13	GND(ID)
2	GND	14	VCC(ID)
3	FMARK	15	RESET
4	GND	16	GND
5	SDA	17	IOVCC1.8
6	GND	18	VCC2.8
7	SCLK	19	GND
8	GND	20	LEDA
9	RS	21	LEDA
10	GND	22	LEDK
11	CS	23	LEDK
12	VCC(ID)	24	GND

メモ :