


10.1" TFT

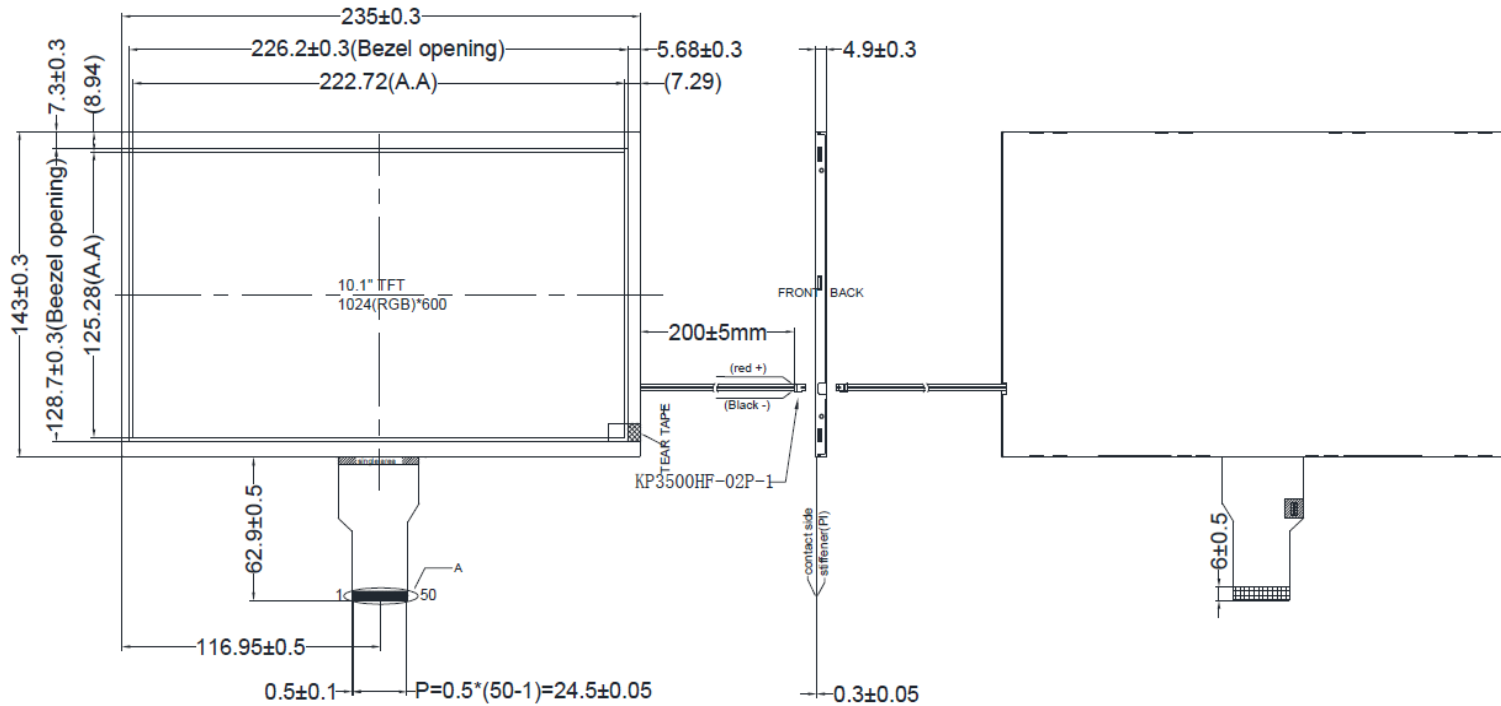

メモ :

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		HX8282-A11& HX8696-A01	
Interface		24BitRGB	
Brightness		350cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	VLED+	27	G0
2	VLED+	28	R7
3	VLED-	29	R6
4	VLED-	30	R5
5	GND	31	R4
6	VCOM	32	R3
7	DVDD	33	R2
8	MODE	34	R1
9	DE	35	R0
10	VS	36	GND
11	HS	37	DCLK
12	B7	38	GND
13	B6	39	L/R
14	B5	40	U/D
15	B4	41	VGH
16	B3	42	VGL
17	B2	43	AVDD
18	B1	44	RESET
19	B0	45	NC
20	G7	46	VCOM
21	G6	47	DITHB
22	G5	48	GND
23	G4	49	NC
24	G3	50	NC
25	G2		
26	G1		