


## 13.3" TFT

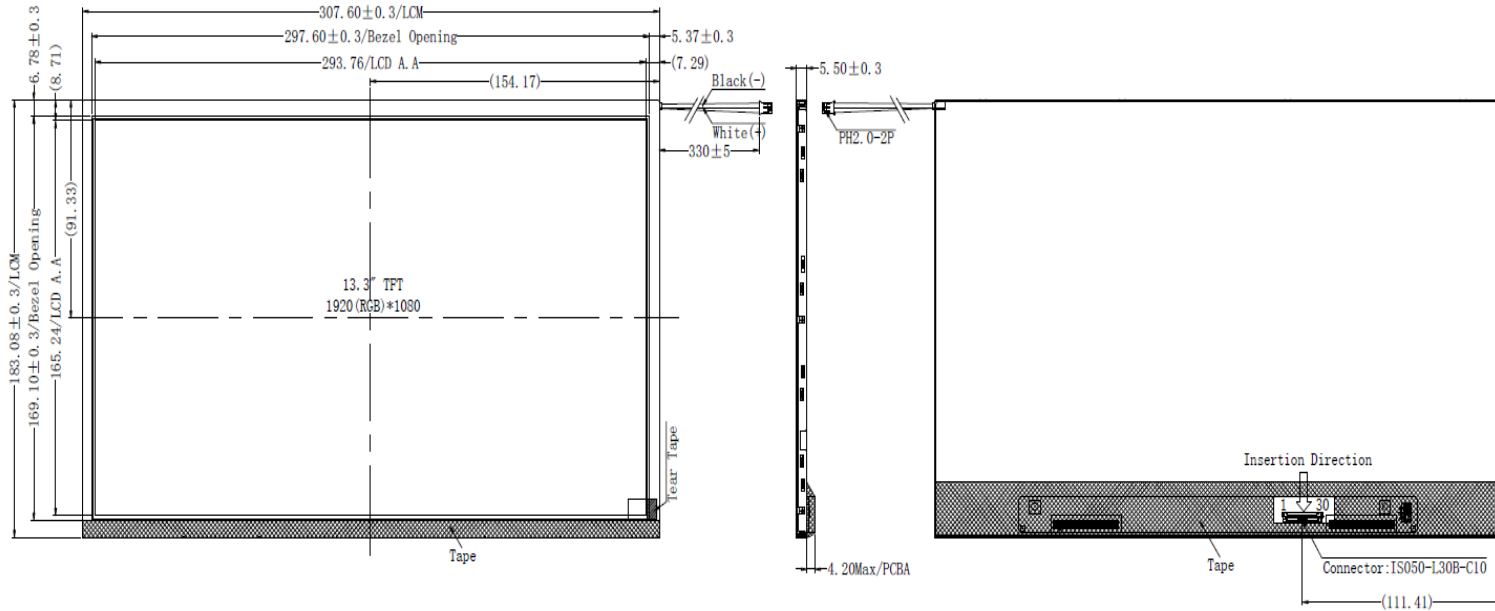

メモ :

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 60 °C	
Storage temp		0 To 50 °C	
Driver IC			
Interface		eDP	
Brightness		400cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	CABC-EN	21	NC
2	GND	22	NC
3	LANE1-N	23	NC
4	LANE1-P	24	NC
5	GND	25	NC
6	LANE0-N	26	NC
7	LANE0-P	27	NC
8	GND	28	NC
9	AUX-CH-P	29	NC
10	AUX-CH-N	30	NC
11	GND		
12	LCD-VCC		
13	LCD-VCC		
14	LCD-TEST		
15	GND		
16	GND		
17	HPD		
18	NC		
19	NC		
20	NC		