


## 2.0" TFT

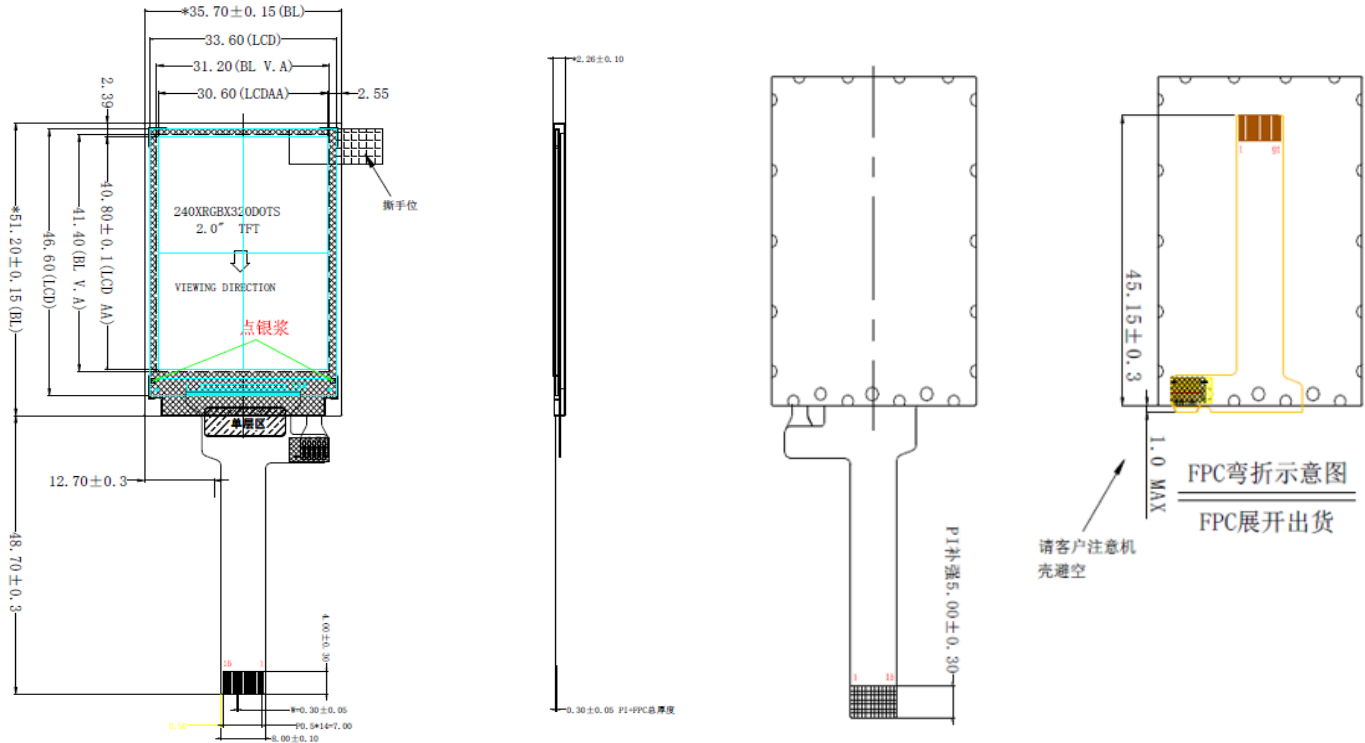

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30 To 80 °C	
Driver IC		ST7789T3	
Interface		4Wire-SPI	
Brightness		350cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	13	GND
2	LEDK	14	GND
3	LEDA	15	GND
4	VDD		
5	GND		
6	GND		
7	D/C		
8	CS		
9	SCL		
10	SDA		
11	RESET		
12	GND		

メモ :