


2.4"TFT

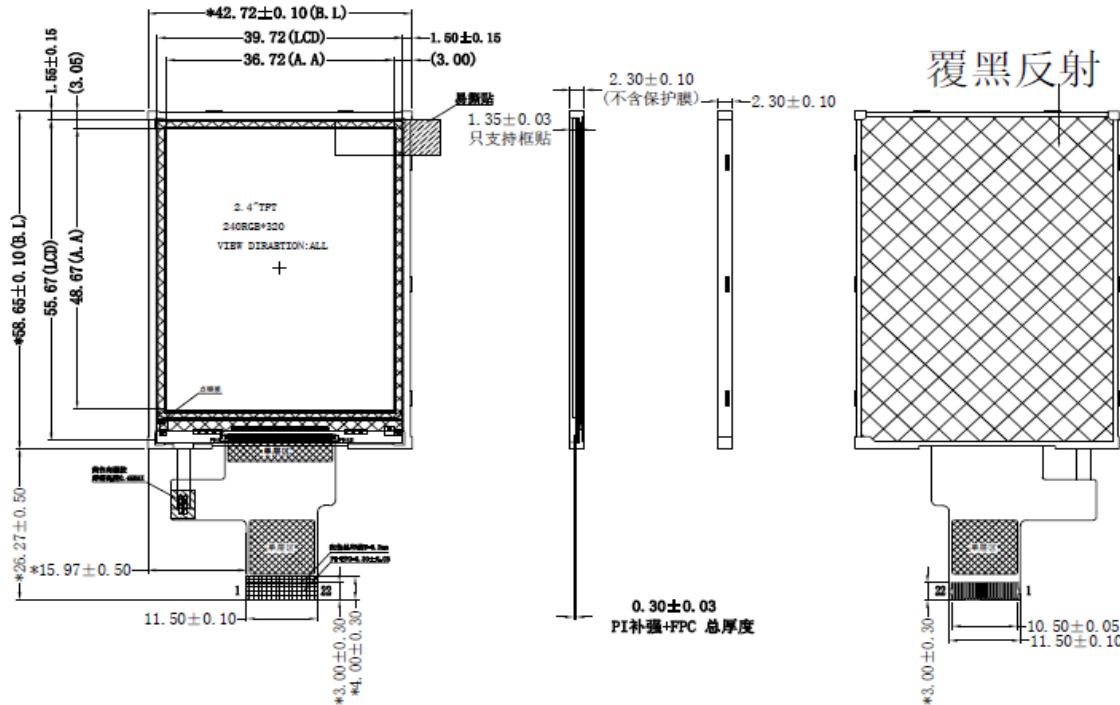

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7789P3	
Interface		8bt MCU	
Brightness		400cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LEDA	13	DB1
2	LEDK	14	DB0
3	NC	15	RD
4	NC	16	WR
5	NC	17	RS
6	VCC2.8V	18	CS
7	DB7	19	TE
8	DB6	20	RESET
9	DB5	21	GND
10	DB4	22	GND
11	DB3		
12	DB2		

メモ :