


2.8" TFT

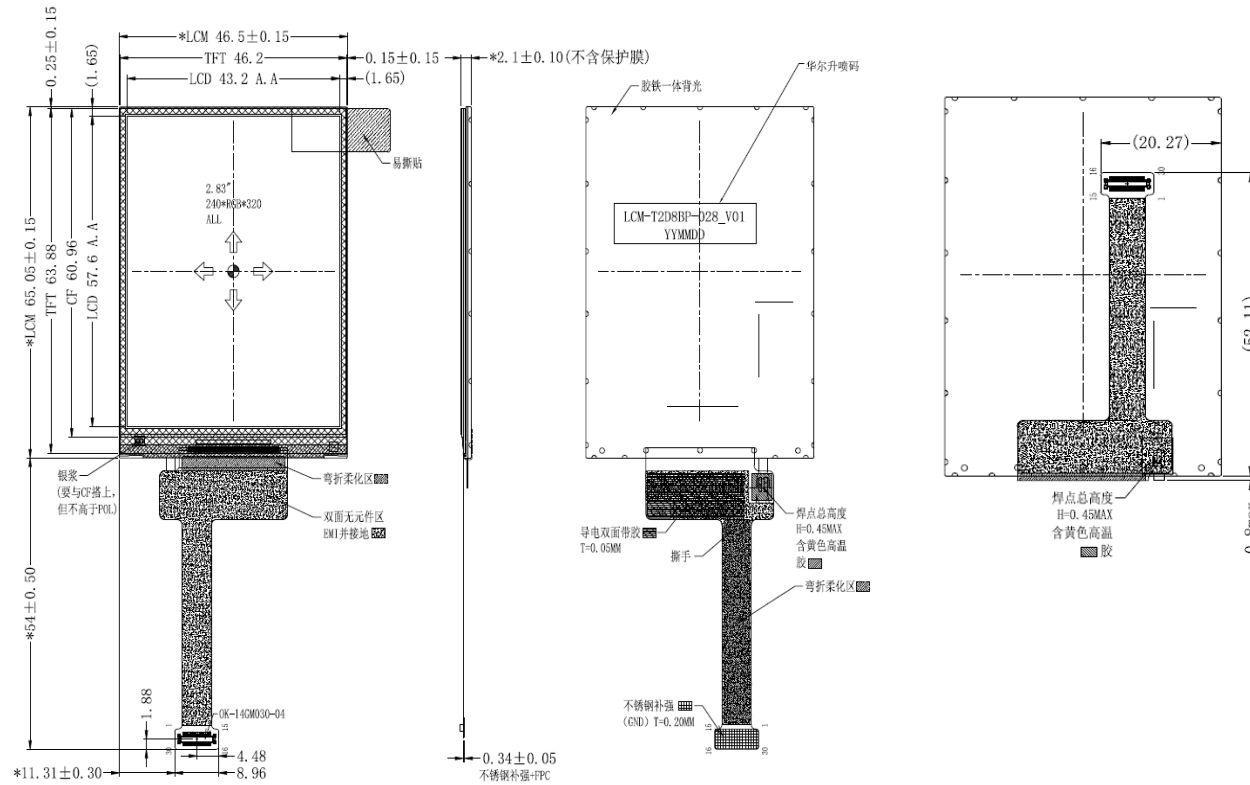

メモ :

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To 70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7789T3	
Interface		MCU16bit	
Brightness		350cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	IOVCC	16	D2
2	TE	17	D1
3	D15	18	D0
4	D14	19	VCC
5	D13	20	GND
6	D12	21	RST
7	D11	22	CS
8	D10	23	RS/DC
9	D9	24	WR
10	D8	25	RD
11	D7	26	LEDK
12	D6	27	LEDK
13	D5	28	LEDA
14	D4	29	LEDA
15	D3	30	GND