


3.2"TFT

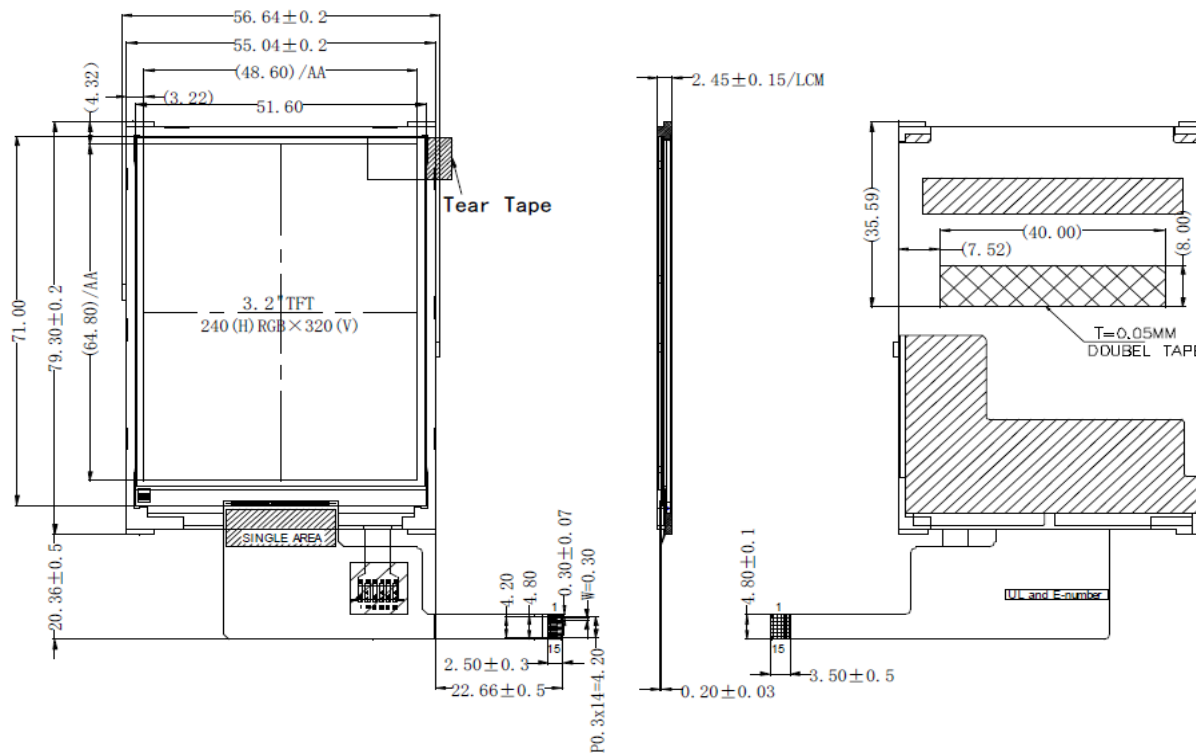

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7789P3	
Interface		SPI	
Brightness		330cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LEDK	13	GND
2	GND	14	LEDA
3	TE	15	LEDA
4	SDA		
5	AO		
6	SCL		
7	CS		
8	RESET		
9	IOVCC1.8		
10	VCC2.8		
11	VCC2.8		
12	GND		

メモ :