


## 3.0" TFT

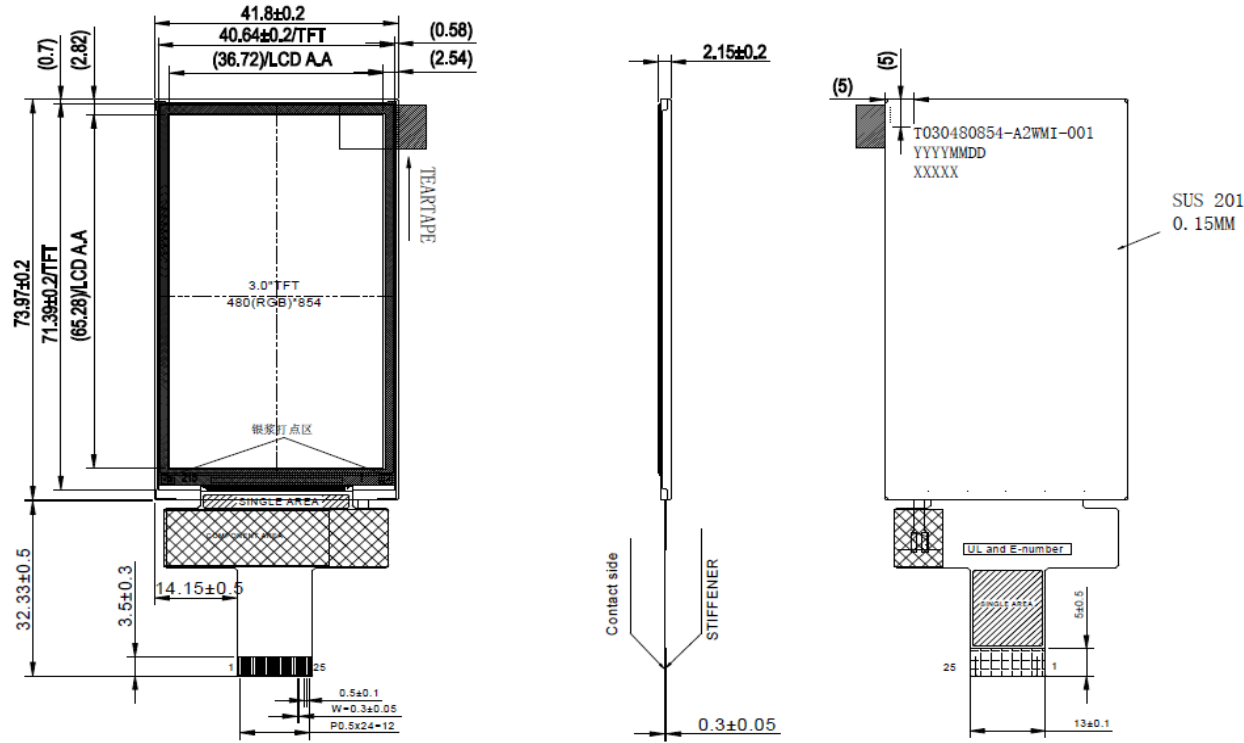

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7102	
Interface		MIPI	
Brightness		200cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	13	IOVCC
2	D1P	14	GND
3	D1N	15	VCI
4	GND	16	GND
5	CP	17	LEDK
6	CN	18	LEDA
7	GND	19	GND
8	DOP	20	TP_INT
9	DON	21	TP_SDA
10	GND	22	TP_RESET
11	REST	23	TP_VCL
12	TE	24	GND

メモ :