


4.3"TFT

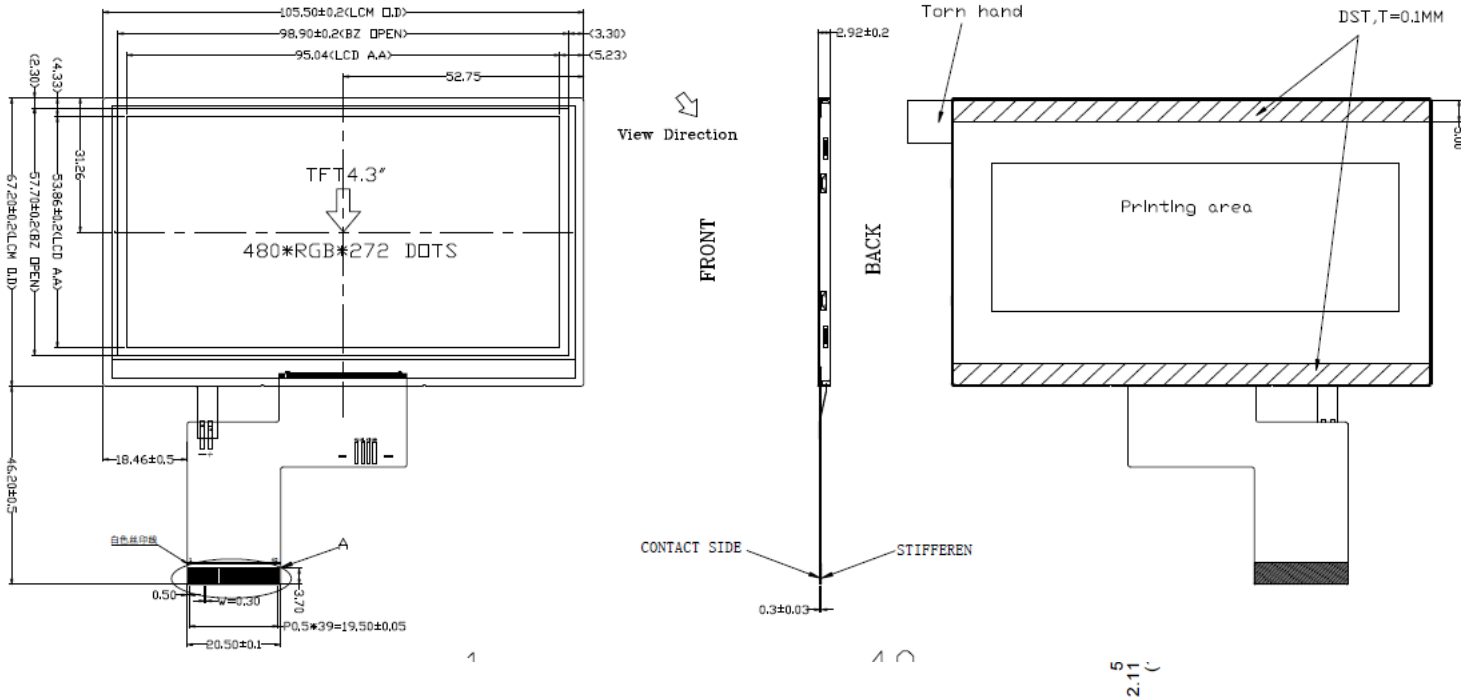

ITEM		STANDARD VALUE	
Viewing direction		TN 120'clock	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7282-G4-1L	
Interface		24bit RGB	
Brightness		280cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LEDK	21	B0
2	LEDA	22	B1
3	GND	23	B2
4	VDD	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	DLCK
11	R6	31	DISP
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	NC(XR)
18	G5	38	NC(YD)
19	G6	39	NC(XL)
20	G7	40	NV(YU)

メモ :