


5" TFT

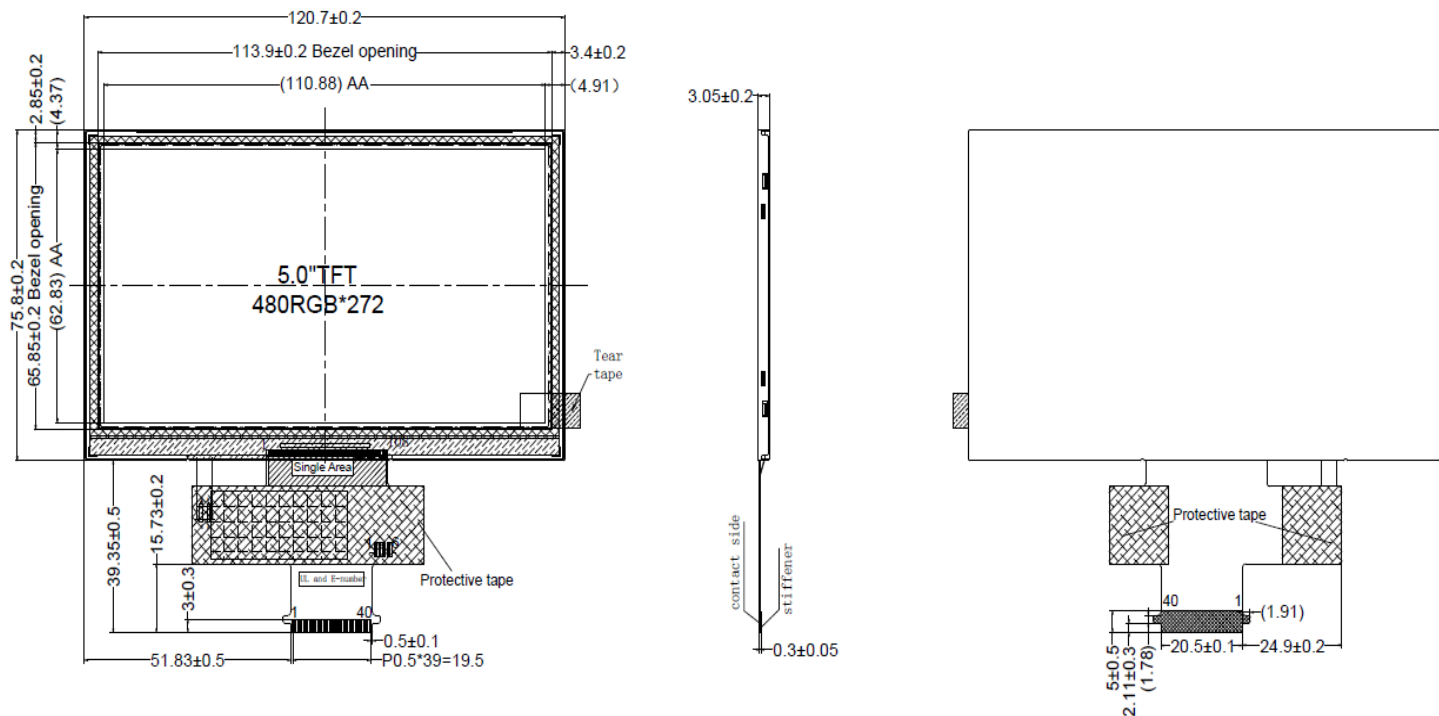

ITEM		STANDARD VALUE	
Viewing direction		TN 120'clock	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		ILI6480B	
Interface		RGB	
Brightness		350cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	VLED-	21	B0
2	VLED+	22	B1
3	GND	23	B2
4	VDD	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	PLCK
11	R6	31	DISP
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	NC(VCC)
16	G3	36	NC(SCL)
17	G4	37	NC(SDA)
18	G5	38	NC(INT)
19	G6	39	NC(RST)
20	G7	40	GND

メモ :