


5"TFT

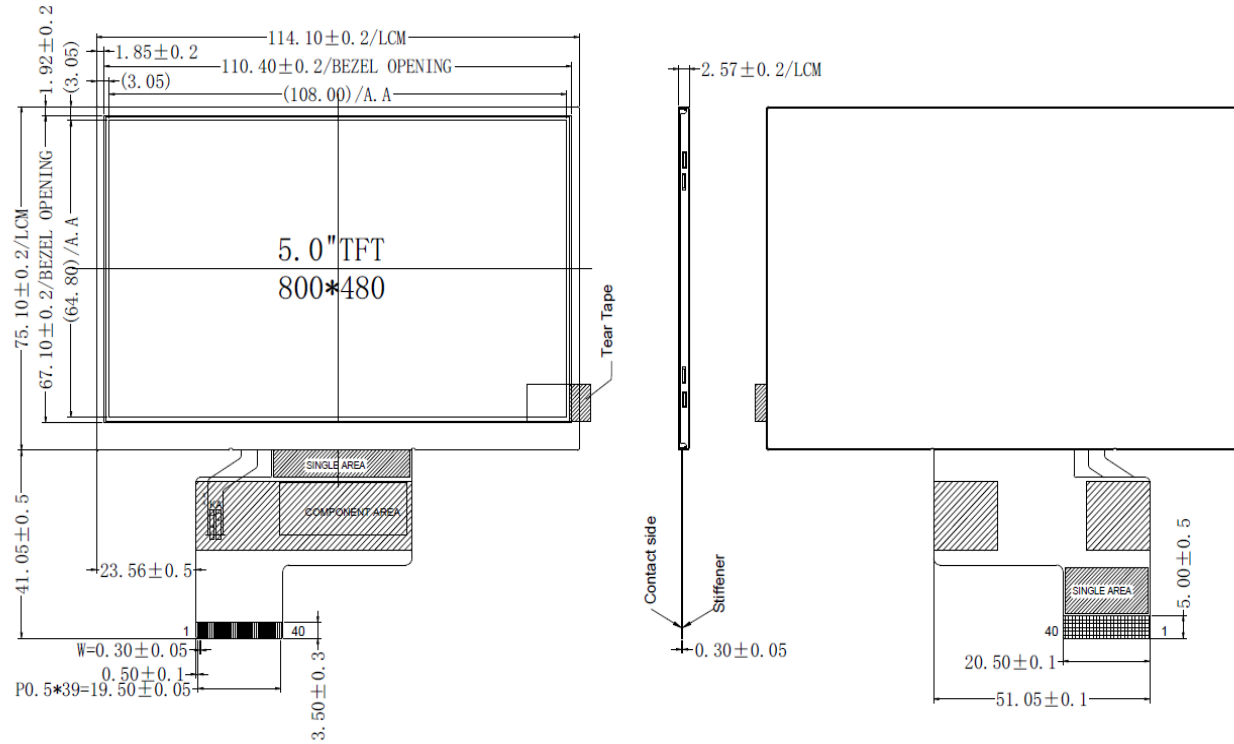

メモ :

ITEM		STANDARD VALUE	
Viewing direction		IPS	
Display mode		Transmissive	
Operation temp		-20 To70 °C	
Storage temp		-30To80 °C	
Driver IC		ST7265	
Interface		RGB	
Brightness		500cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	BL-	21	B0
2	BL+	22	B1
3	GND	23	B2
4	VDD	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	DLCK
11	R6	31	DISP
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	RESET
16	G3	36	GND
17	G4	37	SCL
18	G5	38	SDA
19	G6	39	CS
20	G7	40	OTP