
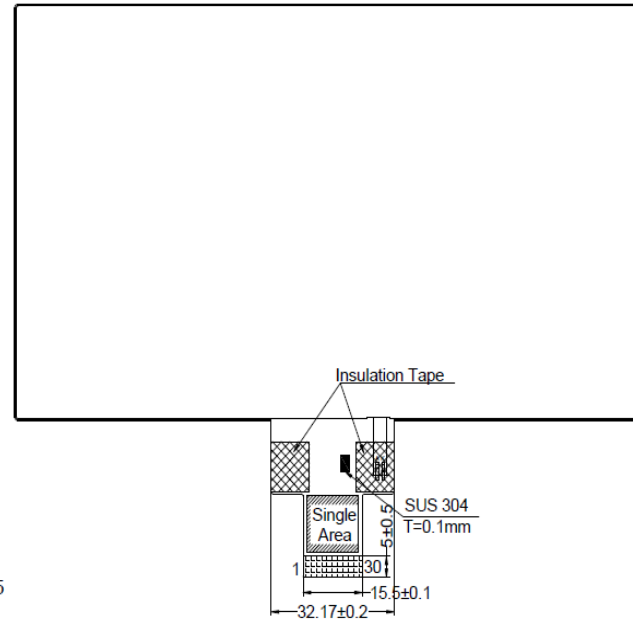


7" TFT

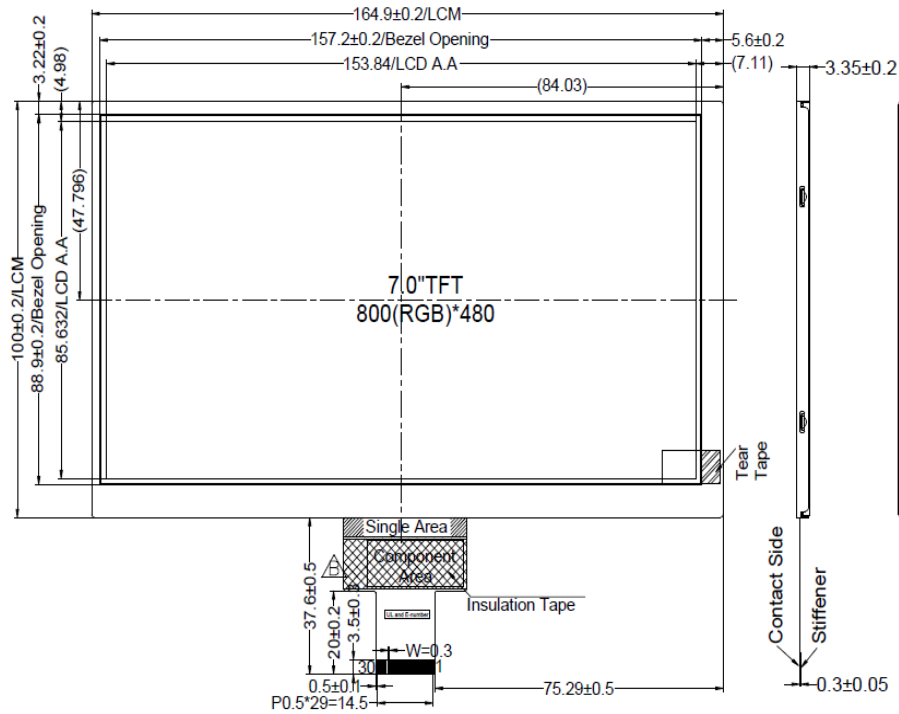

メモ :

| ITEM | | STANDARD VALUE | |
|-------------------|--------|----------------|--------|
| Viewing direction | | IPS | |
| Display mode | | Transmissive | |
| Operation temp | | -20 To70 °C | |
| Storage temp | | -30To80 °C | |
| Driver IC | | ST7277 | |
| Interface | | LVDS | |
| Brightness | | 400cd/m2 (Typ) | |
| PIN | SYMBOL | PIN | SYMBOL |
| 1 | GND | 21 | RXCLK- |
| 2 | DISP | 22 | GND |
| 3 | SCL | 23 | VDDI |
| 4 | SDA | 24 | VDD |
| 5 | CS | 25 | NC |
| 6 | GRB | 26 | NC |
| 7 | GND | 27 | LEDA |
| 8 | RXD0+ | 28 | LEDK |
| 9 | RXD0- | 29 | GND |
| 10 | GND | 30 | GND |
| 11 | RXD1+ | 31 | |
| 12 | RXD1- | 32 | |
| 13 | GND | 33 | |
| 14 | RXD2+ | 34 | |
| 15 | RXD2- | 35 | |
| 16 | GND | 36 | |
| 17 | RXD3+ | 37 | |
| 18 | RXD3- | 38 | |
| 19 | GND | 39 | |
| 20 | RXCLK+ | 40 | |