


2.4" TFT

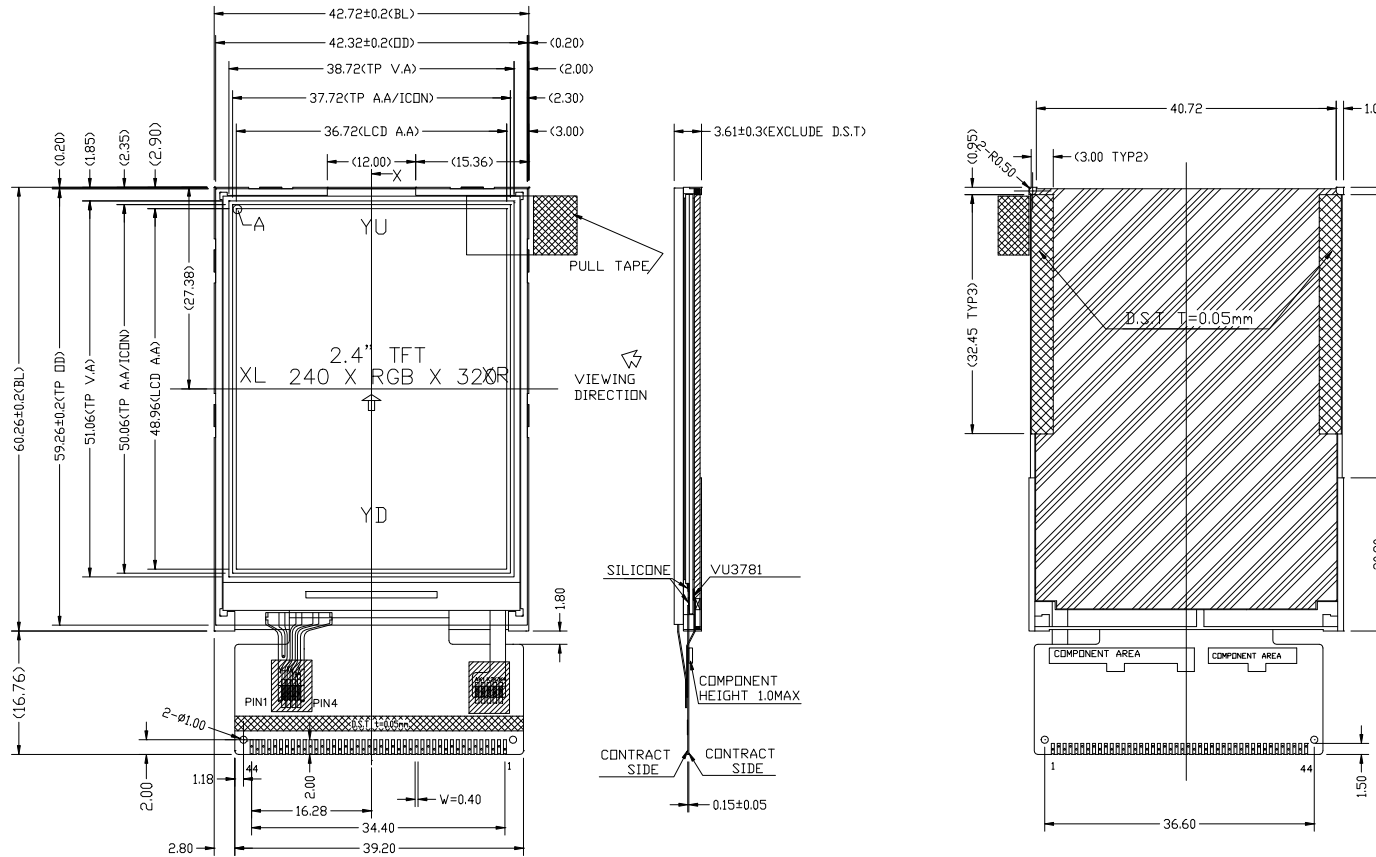

メモ :

ITEM		STANDARD VALUE	
Viewing direction		45/45/45/20	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ST7789V2	
Interface		16Bit MCU	
Backlight		4 Chip LED	
Brightness		280cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	22	D10
2	YU	23	D8
3	XL	24	D7
4	YD	25	D6
5	XR	26	D5
6	GND	27	D4
7	IM0	28	D3
8	IM1	29	D2
9	NC	30	D1
10	NC	31	RD
11	LCD-ID	32	WR
12	RESET	33	RS
13	D9	34	CS
14	D0	35	GND
15	D17	36	IOVCC
16	D16	37	VCC
17	D15	38	LEDK3
18	D14	39	LEDK2
19	D13	40	LEDK1
20	D12	41	LEDKA
21	D11	42	GND