


2.4"TFT

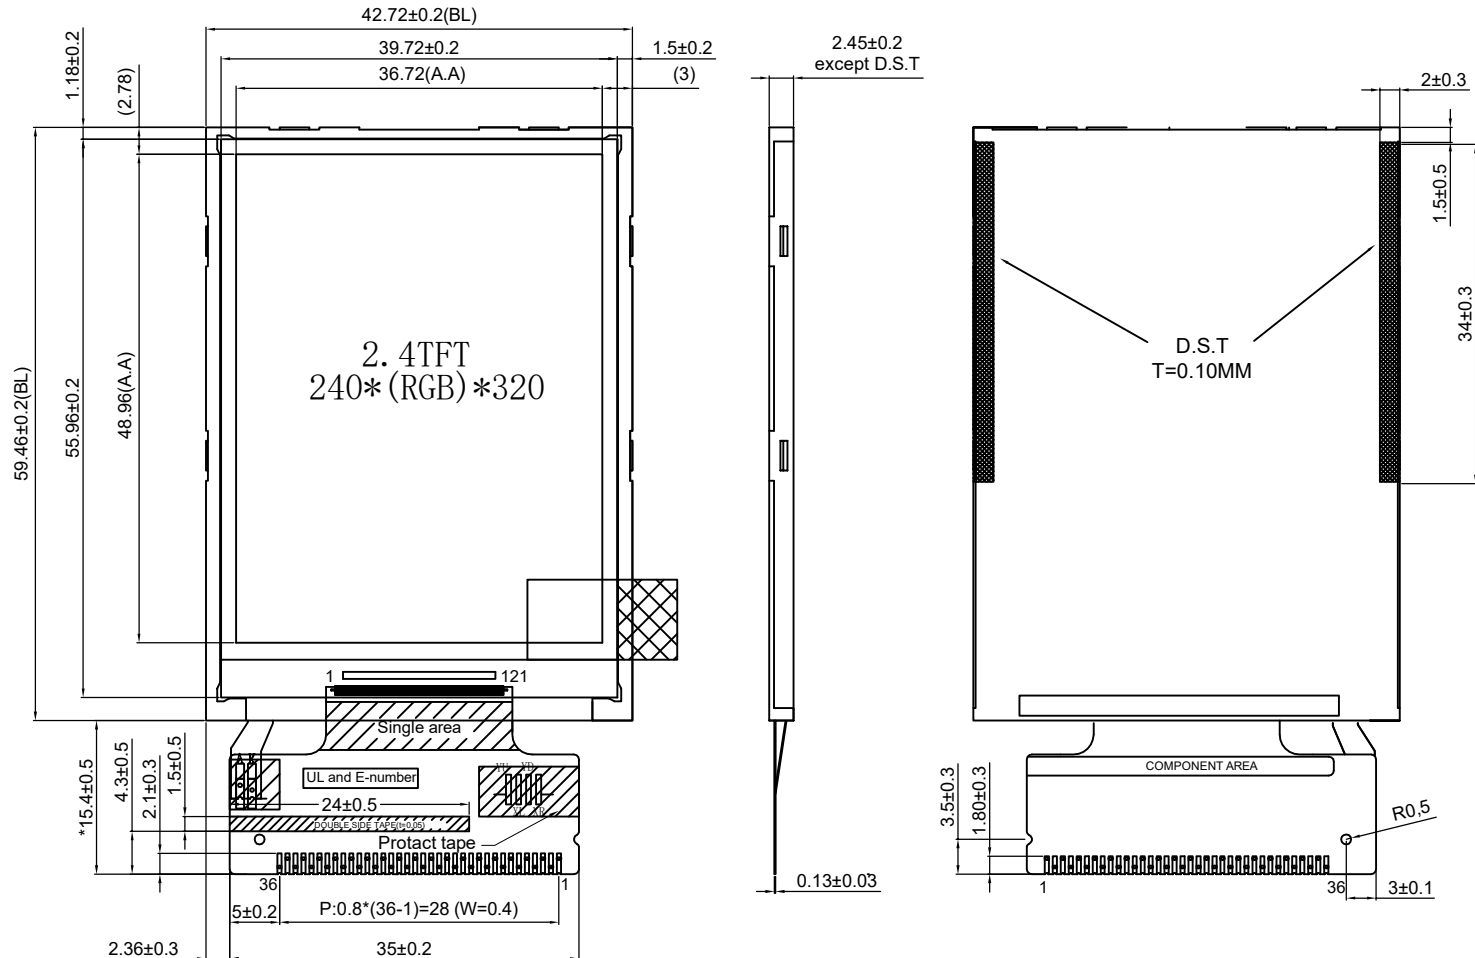

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ILI9341V	
Interface		16Bit Parallel CPU	
Backlight		4 Chip LED	
Brightness		320cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	NC	19	NC(D9)
2	NC(XR)	20	D8
3	NC(YD)	21	D7
4	NC(XL)	22	D6
5	NC(YU)	23	D5
6	RESET	24	D4
7	NC	25	D3
8	NC	26	D2
9	NC	27	D1
10	NC	28	NC(D0)
11	D17	29	RD
12	D16	30	WR
13	D15	31	DC
14	D14	32	CS
15	D13	33	VSS
16	D12	34	VCC
17	D11	35	LED-
18	D10	36	LED+

メモ :