


2.8" TFT

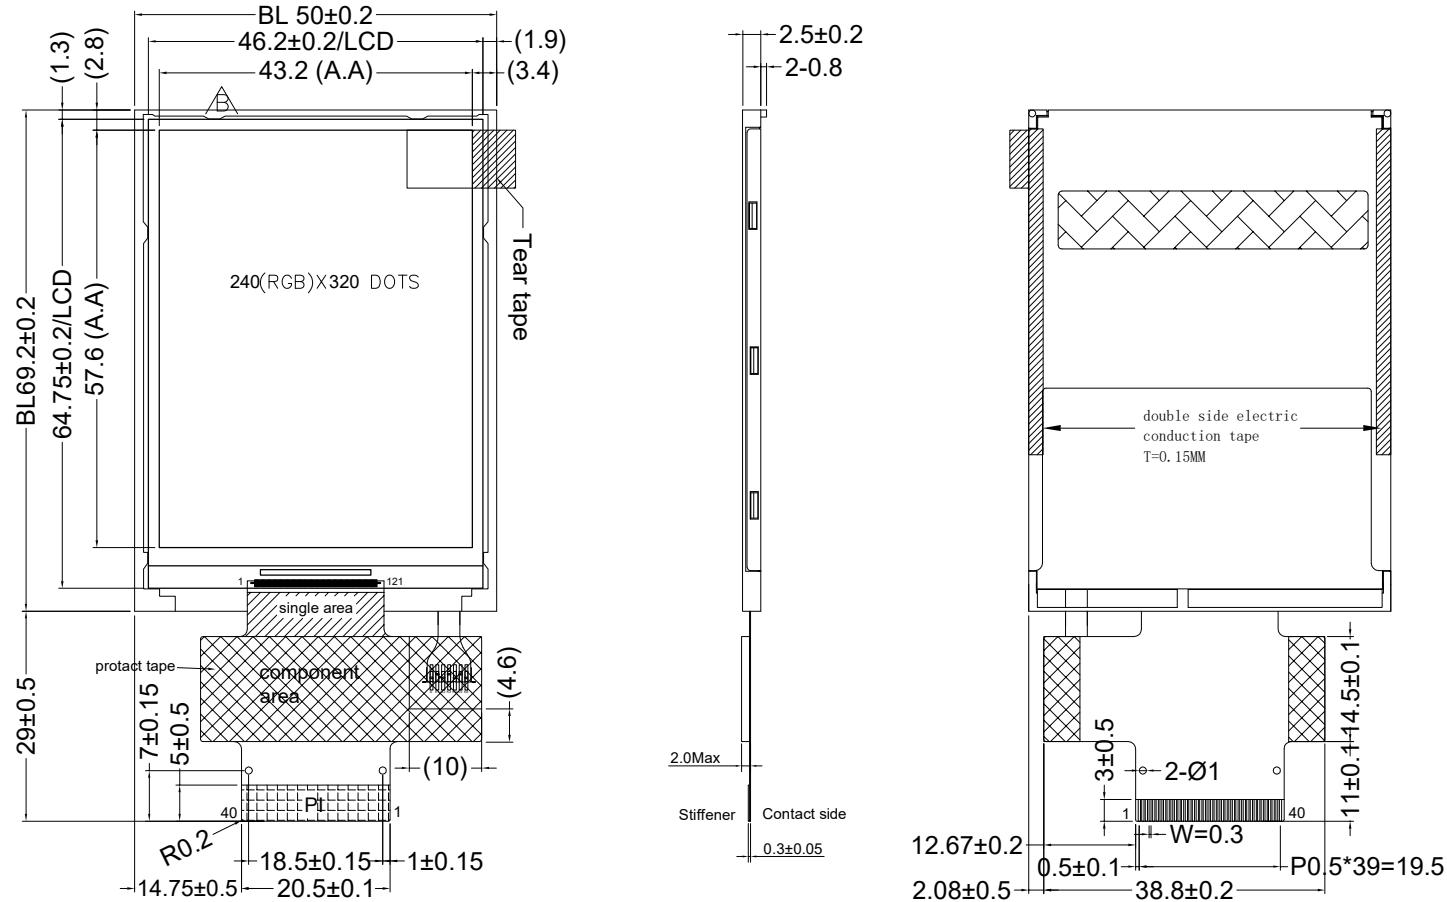

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ILI9341V	
Interface		SPI+8BIT RGB	
Backlight		6 Chip LED	
Brightness		500cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LED-A	21	DB10
2	LED-K1	22	DB9
3	LED-K2	23	DB8
4	LED-K3	24	DB7
5	LED-K4	25	DB6
6	SDA	26	DB5
7	VSYNC	27	DB4
8	HSYNC	28	DB3
9	IM2	29	DB2
10	IM0	30	DB1
11	ENABLE	31	DB0
12	GND	32	NC
13	NRESET	33	NC
14	DB17	34	SCL
15	DB16	35	NCS
16	DB15	36	DOTCLK
17	DB14	37	GND
18	DB13	38	VCI
19	DB12	39	IOVCC
20	DB11	40	NC

メモ :