


3.5" TFT

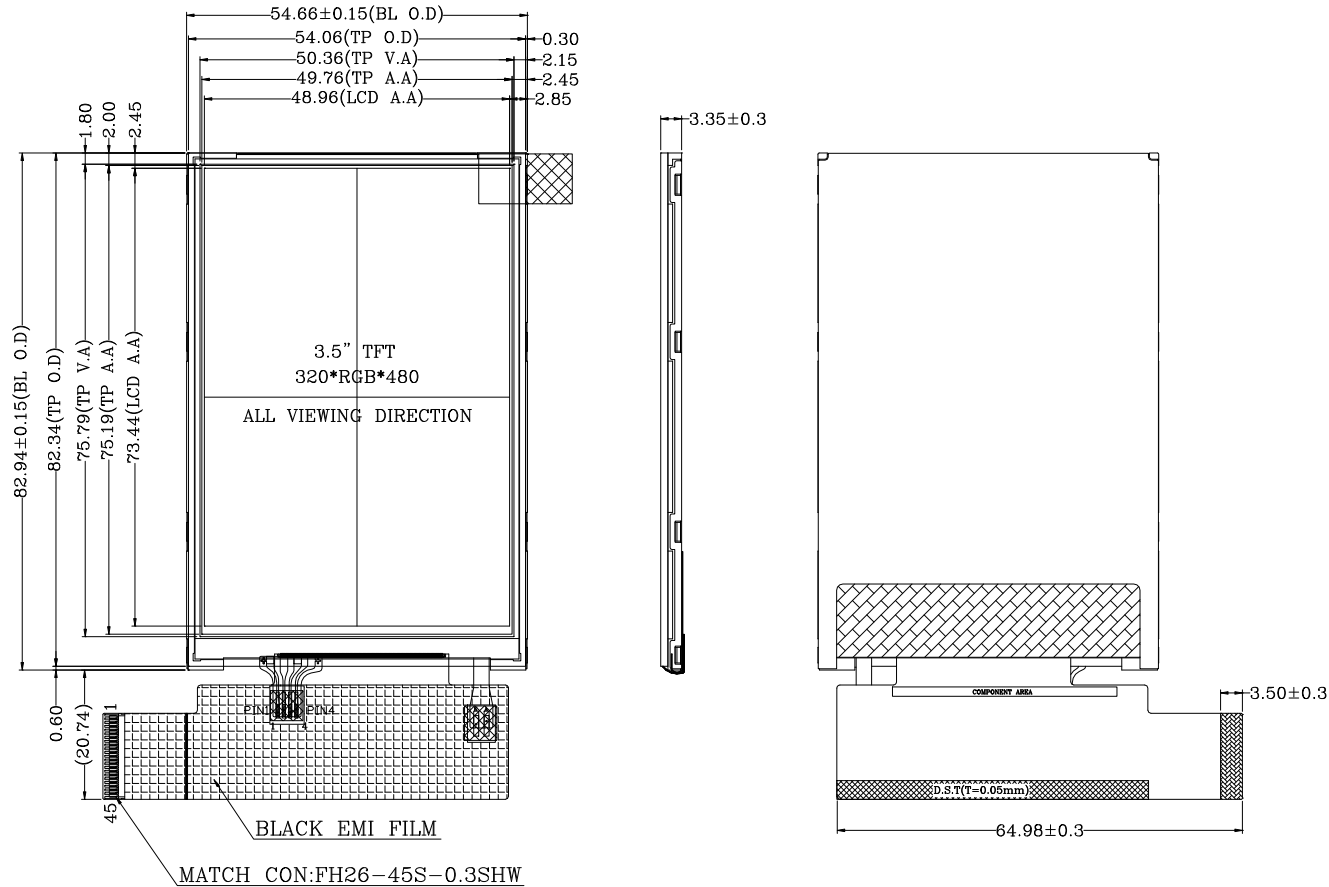

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		HX8357D	
Interface		SPI+RGB	
Backlight		6 Chip LED	
Brightness		290cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	GND	24	DB10
2-3	LED-A	25	DB9
4-5	LED-K	26	DB8
6-7	GND	27	DB7
8	VCC	28	DB6
9	IOVCC	29	DB5
10	/RESET	30	DB4
11	VSYNC	31	DB3
12	HSYNC	32	DB2
13	GND	33	DB1
14	DOTCLK	34	DB0
15	GND	35	SDO
16	DE	36	SDI
17	DB17	37	RDX
18	DB16	38	WRX/SCL
19	DB15	39	D/CX
20	DB14	40	CSX
21	DB13	41	TE
22	DB12	42-43	NC
23	DB11	44-45	NC

メモ :