


4.3" TFT

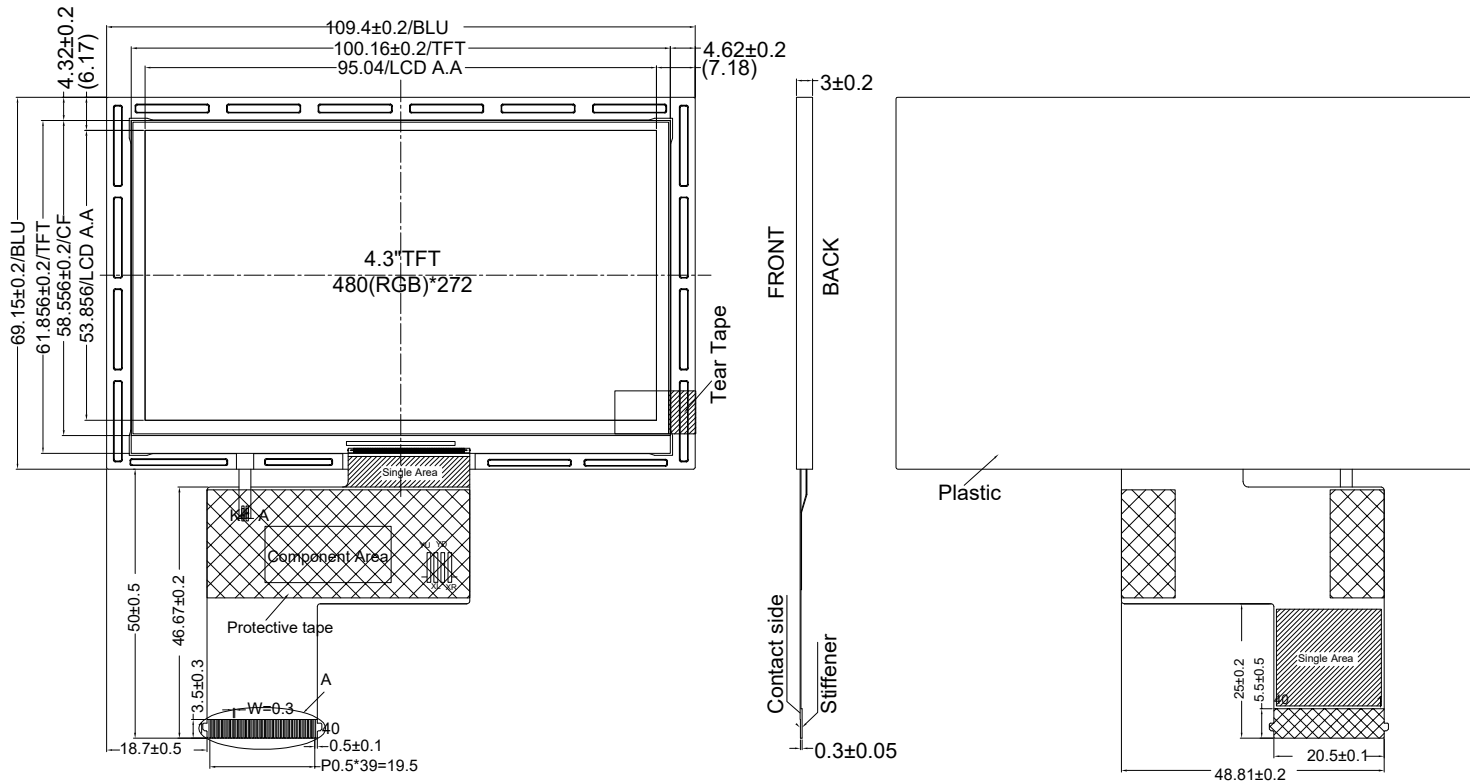

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		SC7283	
Interface		24-Bit RGB	
Backlight		16 Chip LED	
Brightness		400cd/m ² (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	NC	21	B0
2	NC	22	B1
3	NC	23	B2
4	NC	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	PLCK
11	R6	31	DISP
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	NC
18	G5	38	NC
19	G6	39	NC
20	G7	40	NC

メモ :