


## 4.3" TFT

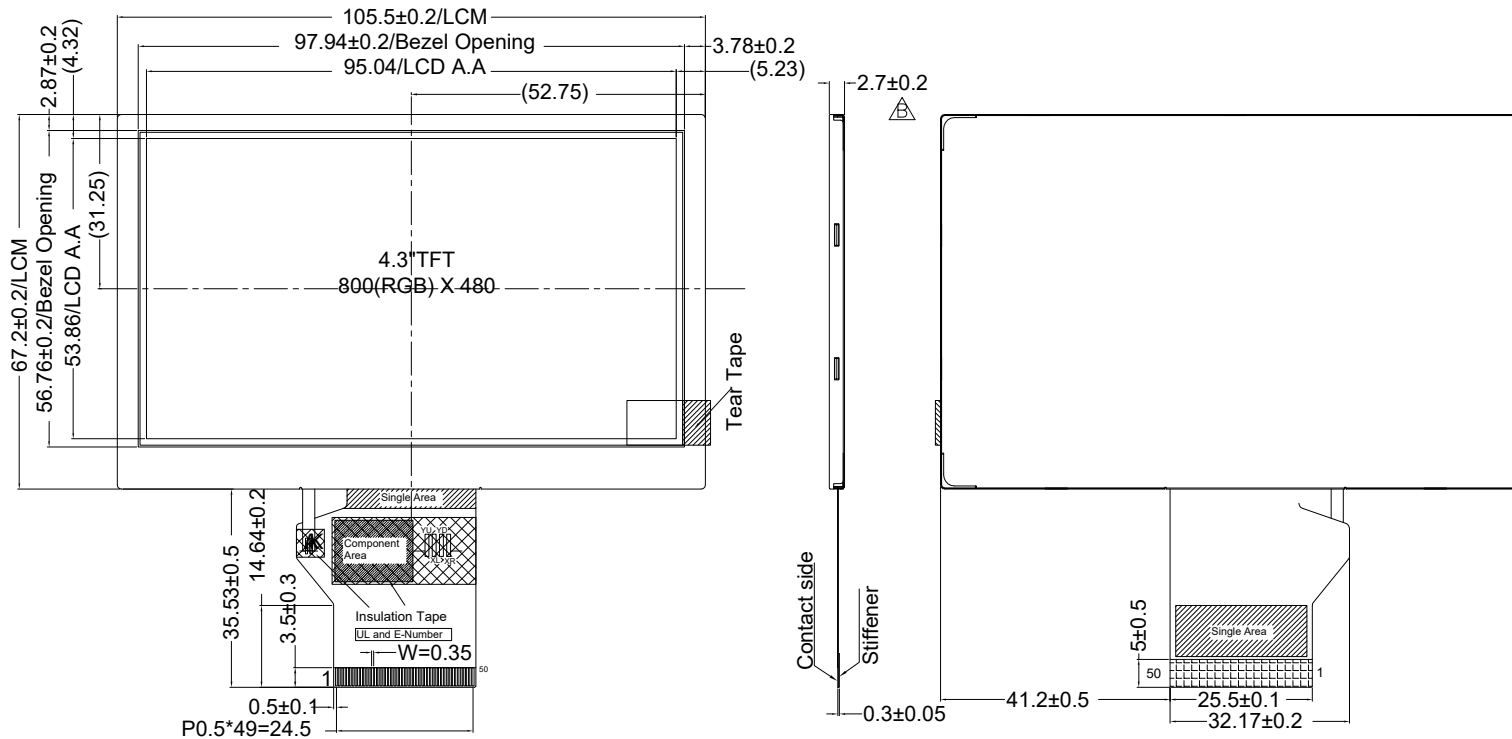

ITEM		STANDARD VALUE	
Viewing direction		80/80/80/80	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		HX8264-D/HX8664-B	
Interface		24-Bit RGB	
Backlight		12 Chip LED	
Brightness		600cd/m2 (Typ)	
PIN		SYMBOL	
1	LED-A	PIN	SYMBOL
2	LED-K	23	G4
3	AVDD	24	G5
4	GND	25	G6
5	DVDD	26	G7
6	RESET	27	B0
7	U/D	28	B1
8	L/R	29	B2
9	DITHB	30	B3
10	MODE	31	B4
11	R0	32	B5
12	R1	33	B6
13	R2	34	B7
14	R3	35	GND
15	R4	36	DCLK
16	R5	37	DE
17	R6	38	HSYNC
18	R7	39	VSYNC
19	G0	40-45	NC
20	G1	46-47	VGH/VGL
21	G2	48	VCOM
22	G3	49/50	GND/NC

メモ :