


4.3"TFT

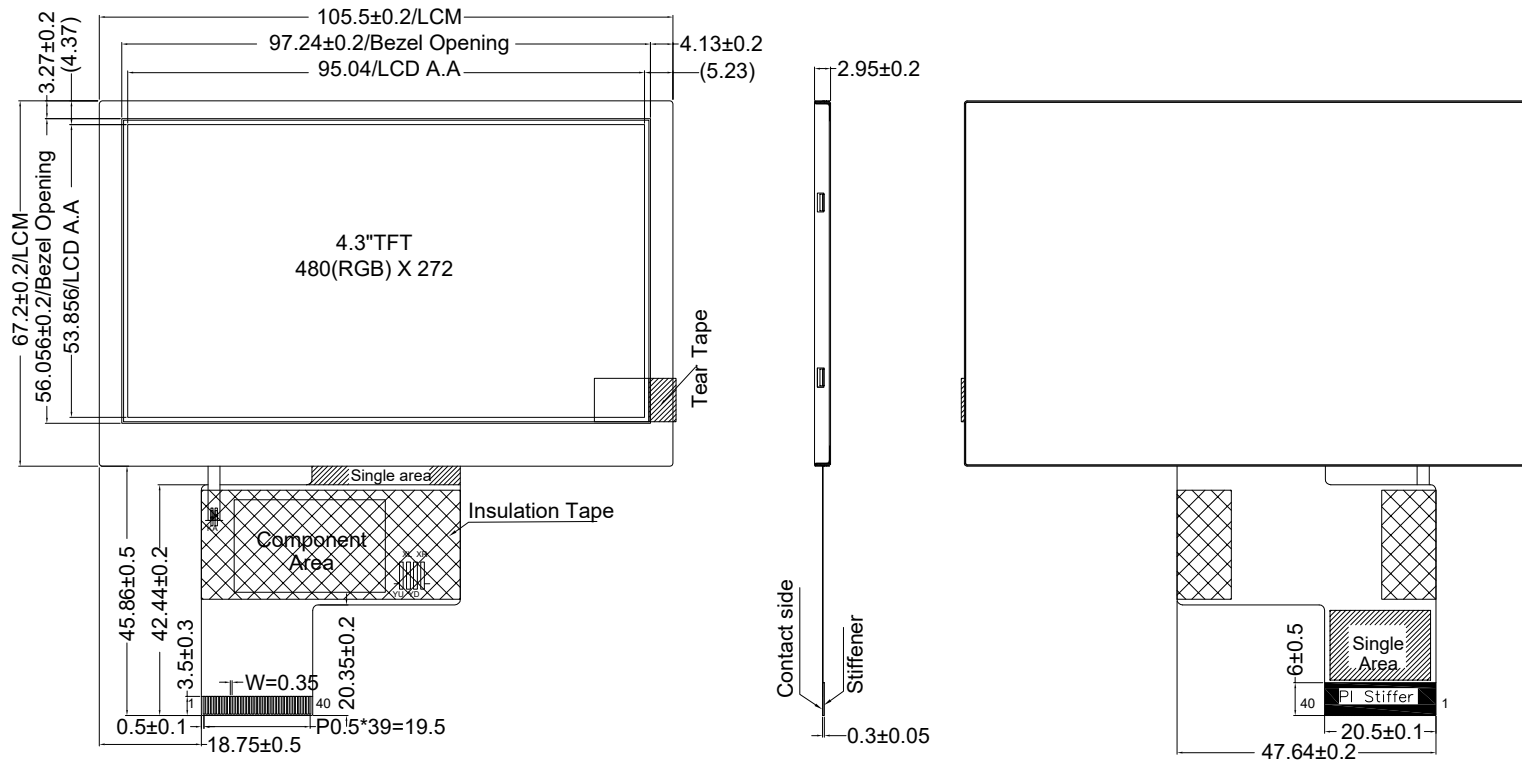

メモ :

ITEM		STANDARD VALUE	
Viewing direction		80/80/60/70	
Display mode		Transmissive	
Operation temp		-20 To 70°C	
Storage temp		-30 To 80°C	
Driver IC		ST7282	
Interface		24-Bit RGB	
Backlight		10 Chip LED	
Brightness		300cd/m ² (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	LED-K	21	R0
2	LED-A	22	R1
3	GND	23	R2
4	VCC	24	R3
5	B0	25	R4
6	B1	26	R5
7	B2	27	R6
8	B3	28	R7
9	B4	29	GND
10	B5	30	DISP
11	B6	31	DEN
12	B7	32	GND
13	G0	33	CLK
14	G1	34	GND
15	G2	35	HSYNC
16	G3	36	VSYNC
17	G4	37	NC
18	G5	38	NC
19	G6	39	NC
20	G7	40	NC