


5.0" TFT

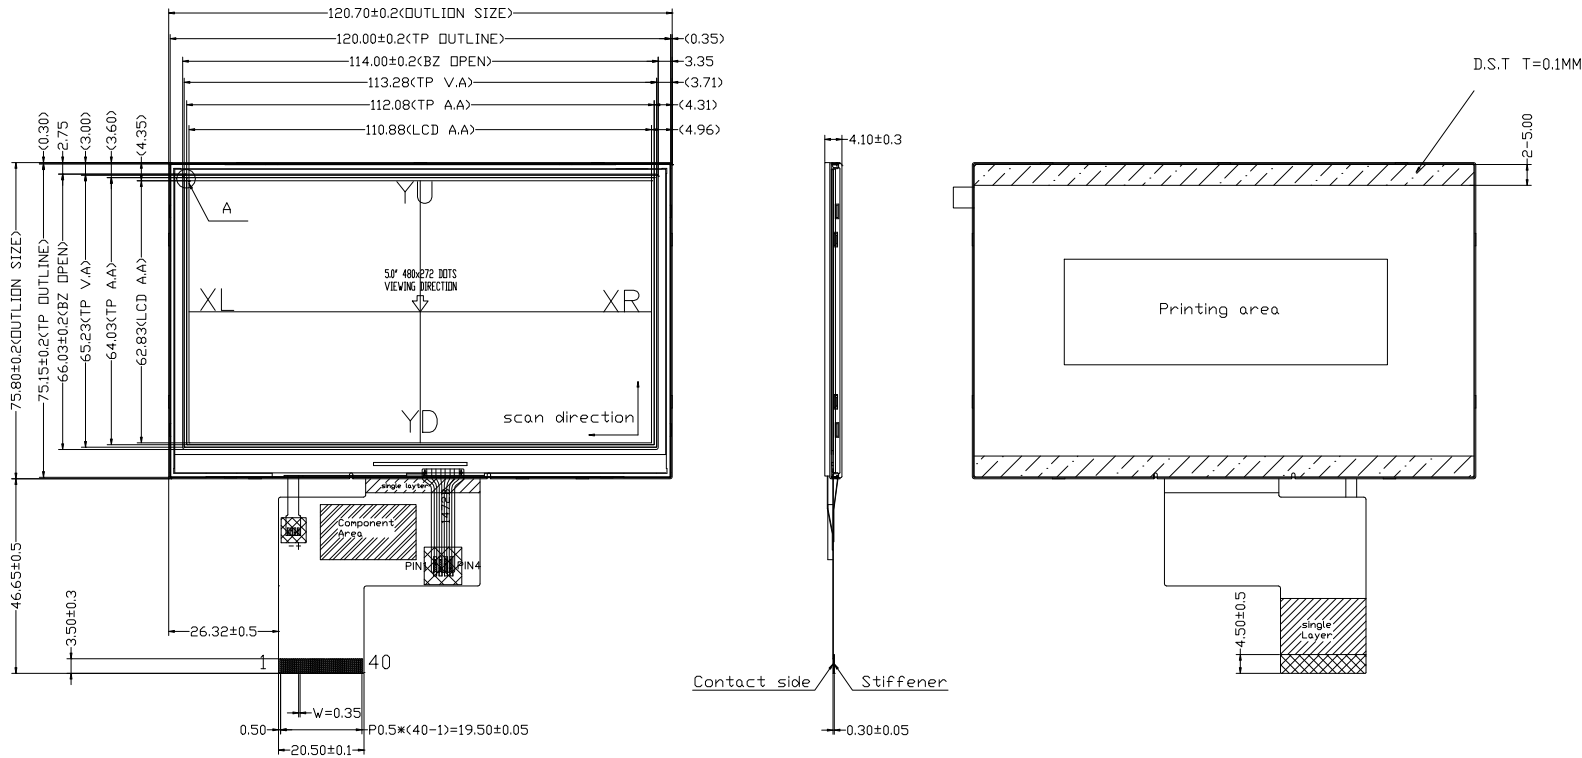

メモ :

ITEM	STANDARD VALUE			
Viewing direction	12 O'CLOCK			
Display mode	Transmissive			
Operation temp	-20°C TO 70°C			
Storage temp	-30°C TO 80°C			
Driver IC	ILI6480BQ			
Interface	24-BIT RGB			
Backlight	10-DIES WHITE			
Brightness	250 cd/m			
	PIN	SYMBOL	PIN	SYMBOL
	1	LED-	21	B0
	2	LED+	22	B1
	3	GND	23	B2
	4	VDD	24	B3
	5	R0	25	B4
	6	R1	26	B5
	7	R2	27	B6
	8	R3	28	B7
	9	R4	29	GND
	10	R5	30	DCLK
	11	R6	31	DISP
	12	R7	32	HSYN
	13	G0	33	VSYNC
	14	G1	34	DE
	15	G2	35	NC
	16	G3	36	GND
	17	G4	37	XR
	18	G5	38	YD
	19	G6	39	XL
	20	G7	40	YU