
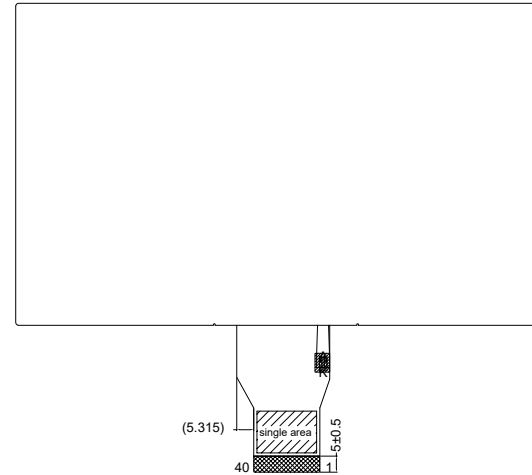


7.0" TFT

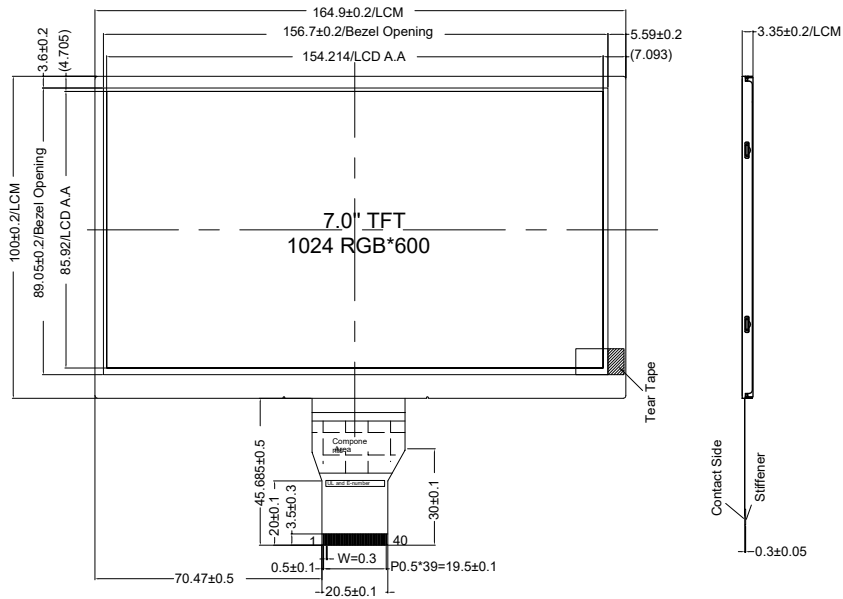

ITEM		STANDARD VALUE	
Viewing direction		FULL VIEW	
Display mode		Transmissive	
Operation temp		-20°C To 70°C	
Storage temp		-30°C To 80°C	
Driver IC		EK79001&EK73215	
Interface		LVDS	
Backlight		White(24LED)	
Brightness		370cd/m2 (Typ)	
PIN	SYMBOL	PIN	SYMBOL
1	VCOM	21	RXIN3+
2	VDD	22	GND
3	VDD	23	NC
4	NC	24	NC
5	RESET	25	GND
6	STBYB	26	NC
7	GND	27	DIM0
8	RXIN0-	28	SELB
9	RXIN0+	29	AVDD
10	GND	30	GND
11	RXIN1-	31	LED-
12	RXIN1+	32	LED-
13	GND	33	L/R
14	RXIN2-	34	U/D
15	RXIN2+	35	VGL
16	GND	36	NC
17	RXCLKIN-	37	NC
18	RXCLKIN+	38	VGH
19	GND	39	LED+
20	RXIN3-	40	LED+

メモ :